



INTRODUCTION

Since its founding in 1975, Sofia Refrigeration has provided highquality commercial refrigerators, from undercounter to upright models, to the hospitality and food industries.

We have a global reach and have worked with a variety of clients, including hotels, restaurants, butcher shops, and bakeries across the Gulf region, Asia, and the larger United Arab Emirates.

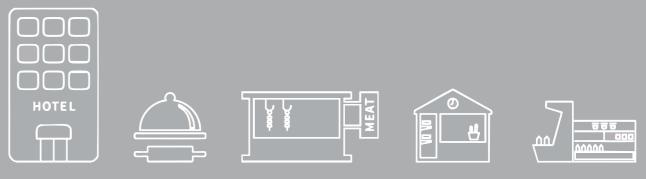












TABLE OF CONTENTS

Primary Line	6
Core Line	22
American Line	26
Variable Temperature Drawer	30
Blast Chiller-Freezer	32
Slim Line and Dual Temperature	36
Ultra Low Freezer	38
Wine Cooler	42
Dry Ager	44
Meat Hanging Chiller	46
Grab and Go	48
Banquet Trolley	50
Solid Waste Cooler	52
Bespoke Solutions	54
Certifications and Standards	59

PRIMARY LINE

CHILLER AND FREEZER

Upright Bottle Cooler Series

DETAILS

- Grade 304 stainless steel interior and exterior
- EVCO touch screen thermostat
- Auto-defrosting mode
- Ventilated cooling system

OPTION

- Electrostatic plating

- Environmental temperature: 32°C
- LED lighting (2700 Kelvin light warm white)
- Double-glazed glass door with removable gasket
- Adjustable shelves
- Solid door

SOFBC-UP1 BS

Upright One Door Black Bottle Cooler W600 D510 H1800



Capacity: 328L Power: 340W Frequency: 50/60Hz Temperature: +2~+8°C Volts: 220~240V | 1PH

Accessories Included

5 black epoxy-coated grid shelves



Packing Dimension: W640 D570 H1950 Weight: 70kg

SOFBC-UP1 SS

Upright One Door Stainless Steel Bottle Cooler W600 D510 H1800



Capacity: 328L Power: 340W Frequency: 50/60Hz Temperature: +2~+8°C Volts: 220~240V | 1PH

Accessories Included

5 epoxy-coated grid shelves



Packing Dimension: W640 D570 H1950 Weight: 70kg

SOFBC-UP2 BS

Upright Two Door Black Bottle Cooler W900 D510 H1800



Capacity: 528L Power: 450W Frequency: 50/60Hz Temperature: +2~+8°C Volts: 220~240V | 1PH

Accessories Included

5 black epoxy-coated grid shelves



Packing Dimension: W950 D570 H1950 Weight: 125kg

SOFBC-UP2 SS

Upright Two Door Stainless Steel Bottle Cooler W900 D510 H1800



Capacity: 528L Power: 450W Frequency: 50/60Hz Temperature: +2~+8°C Volts: 220~240V | 1PH

Accessories Included

5 epoxy-coated grid shelves



Packing Dimension: W950 D570 H1950 Weight: 125kg

Bottle Cooler High Ambient Series

DETAILS

- Grade 316 stainless steel interior and exterior
- EVCO touch screen thermostat
- Auto-defrosting mode
- Ventilated cooling system

OPTION

- Electrostatic plating

- Double-glazed glass door with removable gasket
- Adjustable shelves

SOFBC-UP1 316 HA

Upright One Door High Ambient Bottle Cooler W600 D510 H1800



Capacity: 328L Power: 340W Frequency: 50/60Hz Temperature: +2~+8°C Volts: 220~240V | 1PH

Accessories Included

5 epoxy-coated grid shelves



Packing Dimension: W640 D570 H1950 Weight: 70kg

SOFBC-UP2 316 HA

Upright Two Door High Ambient Bottle Cooler W900 D510 H1800



Capacity: 528L Power: 450W Frequency: 50/60Hz Temperature: +2~+8°C Volts: 220~240V | 1PH

Accessories Included

■ 5 epoxy-coated grid shelves



Packing Dimension: W950 D570 H1950 Weight: 125kg

- Environmental temperature: 43°C

- LED lighting (2700 Kelvin light warm white)

- Solid door

DETAILS

- Grade 304 stainless steel interior and exterior
- EVCO touch screen thermostat
- Auto-defrosting mode
- Ventilated cooling system

OPTION

- Electrostatic plating

SOFBC-1 BS

Undercounter One Door Black Bottle Cooler W600 D510 H850





Capacity: 126L Power: 230W Frequency: 50/60Hz Temperature: +2~+8°C Volts: 220~240V | 1PH

Undercounter Bottle Cooler Series

2 black epoxy-coated grid shelves

- Environmental temperature: 32°C

- LED lighting (2700 Kelvin light warm white)
- Double-glazed glass door with removable gasket
- Adjustable shelves

- Solid door

SOFBC-1 SS

Undercounter One Door Stainless Steel Bottle Cooler W600 D510 H850



Packing Dimension: W650 D570 H1000 Weight: 55kg

Capacity: 126L Power: 230W Frequency: 50/60Hz Temperature: +2~+8°C Volts: 220~240V | 1PH

2 epoxy-coated grid shelves

SOFBC-2 BS

Undercounter Two Door Black Bottle Cooler W900 D510 H850





Capacity: 220L Power: 260W Frequency: 50/60Hz Temperature: +2~+8°C Volts: 220~240V | 1PH

Accessories Included

2 black epoxy-coated grid shelves

SOFBC-2 SS

Undercounter Two Door Stainless Steel Bottle Cooler W900 D510 H850





Capacity: 220L Power: 260W Frequency: 50/60Hz Temperature: +2~+8°C Volts: 220~240V | 1PH

Accessories Included

2 epoxy-coated grid shelves

SOFBC-3 BS

Undercounter Three Door Black Bottle Cooler W1350 D510 H850



Packing Dimension: W1380 D570 H1000 Weight: 75kg

Capacity: 300L Power: 330W Frequency: 50/60Hz Temperature: +2~+8°C Volts: 220~240V | 1PH

Accessories Included

2 black epoxy-coated grid shelves

SOFBC-3 SS

Undercounter Three Door Stainless Steel Bottle Cooler W1350 D510 H850



Packing Dimension: W1380 D570 H1000 Weight: 75kg

Capacity: 300L Power: 330W Frequency: 50/60Hz Temperature: +2~+8°C Volts: 220~240V | 1PH

Accessories Included

2 epoxy-coated grid shelves

Bottle Cooler High Ambient Series

DETAILS

- Grade 316 stainless steel interior and exterior
- EVCO touch screen thermostat
- Auto-defrosting mode
- Ventilated cooling system

OPTION

- Electrostatic plating

SOFBC-1 316 HA

Undercounter One Door High Ambient Bottle Cooler W600 D510 H850



Packing Dimension: W650 D570 H1000 Weight: 55kg

Capacity: 126L Temperature: +2~+8°C Volts: 220~240V | 1PH

Power: 230W Frequency: 50/60Hz

Accessories Included

2 epoxy-coated grid shelves

SOFBC-2 316 HA

Undercounter Two Door High Ambient Bottle Cooler W900 D510 H850



Packing Dimension: W930 D570 H1000 Weight: 65kg

Capacity: 220L Power: 260W Frequency: 50/60Hz Temperature: +2~+8°C Volts: 220~240V | 1PH

Accessories Included

2 epoxy-coated grid shelves

SOFBC-3 316 HA

Undercounter Three Door High Ambient Bottle Cooler W1350 D510 H850



Packing Dimension: W1380 D570 H1000 Weight: 75kg

Capacity: 300L Power: 330W Frequency: 50/60Hz Temperature: +2~+8°C Volts: 220~240V | 1PH

Accessories Included

2 epoxy-coated grid shelves

- Environmental temperature: 43°C

- LED lighting (2700 Kelvin light warm white)
- Double-glazed glass door with removable gasket
- Adjustable shelves
- Solid door

Glass Froster Series

DETAILS

- Grade 304 stainless steel interior and exterior
- EVCO touch screen thermostat
- Auto-defrosting mode
- Ventilated cooling system

OPTION

- Electrostatic plating

- Environmental temperature: 32°C
- LED lighting (2700 Kelvin light warm white)
- Triple-glazed glass door with removable gasket
- Adjustable shelves

- Solid door

SOFBC-1 GF FE

One Door Glass Froster Freezer W600 D510 H850





Packing Dimension: W650 D570 H1000 Weight: 55kg

Capacity: 126L Power: 230W Frequency: 50/60Hz Temperature: -18~-22°C Volts: 220~240V | 1PH

2 epoxy-coated grid shelves

SOFBC-2 GF FE

Two Door Glass Froster Freezer W900 D510 H850





Packing Dimension: W930 D570 H1000 Weight: 65kg

Capacity: 220L Power: 260W Frequency: 50/60Hz Temperature: -18~-22°C Volts: 220~240V | 1PH

2 epoxy-coated grid shelves

Low Boy Chiller Series

DETAILS

- Grade 304 stainless steel interior and exterior
- Copeland touch screen thermostat
- Auto-defrosting mode
- Ventilated cooling system

OPTION

- Caster wheels

SOFL-120

Two Drawer Stainless Steel Chiller W1200 D700 H650





Packing Dimension: W1270 D770 H670 Weight: 93kg

- Environmental temperature: 43°C
- Removable drawer track support
- Adjustable legs
- Electrostatic plating

Capacity: 155L Power: 320W Frequency: 50/60Hz Temperature: +2~+8°C

Volts: 220~240V | 1PH



Fits 2 x 1/1 GN per drawer (GN excluded)

SOFL-142

Four Drawer Stainless Steel Chiller W1420 D700 H650





Packing Dimension: W1470 D770 H670 Weight: 127kg

Capacity: 195L Power: 310W Frequency: 50/60Hz

Temperature: +2~+8°C Volts: 220~240V | 1PH



Fits 1 x 1/1 GN per drawer (GN excluded)

SOFL-190

Six Drawer Stainless Steel Chiller W1900 D700 H650





Packing Dimension: W1960 D770 H670 Weight: 145kg

Capacity: 305L Power: 380W Frequency: 50/60Hz

Temperature: +2~+8°C Volts: 220~240V | 1PH



Fits 1 x 1/1 GN per drawer (GN excluded)

left compressor option



Low Boy Freezer Series

DETAILS

- Grade 304 stainless steel interior and exterior
- Copeland touch screen thermostat
- Auto-defrosting mode
- Ventilated cooling system

OPTION

- Caster wheels

- Electrostatic plating

- Adjustable legs

- Environmental temperature: 43°C

- Removable drawer track support

SOFL-120 FE

Two Drawer Stainless Steel Freezer W1200 D700 H650





Packing Dimension: W1270 D770 H670 Weight: 93kg

Capacity: 155L Power: 495W Frequency: 50/60Hz Temperature: -18~-20°C Volts: 220~240V | 1PH



Fits 2 x 1/1 GN per drawer (GN excluded)

SOFL-142 FE

Four Drawer Stainless Steel Freezer W1420 D700 H650





Packing Dimension: W1470 D770 H670 Weight: 127kg

Capacity: 195L Power: 475W Frequency: 50 or 60Hz Temperature: -18~-20°C Volts: 220~240V | 1PH



Fits 1 x 1/1 GN per drawer (GN excluded)

SOFL-190 FE

Six Drawer Stainless Steel Freezer W1900 D700 H650





Packing Dimension: W1960 D770 H670 Weight: 145kg

Capacity: 305L Power: 680W Frequency: 50 or 60Hz

Temperature: -18~-20°C Volts: 220~240V | 1PH



Fits 1 x 1/1 GN per drawer (GN excluded)

left compressor option



12 SOFIA Refrigeration Refrigeration 13



Upright Series

DETAILS

- Grade 304 stainless steel interior and exterior
- Copeland touch screen thermostat
- Auto-defrosting mode
- Ventilated cooling system

OPTION

- Additional shelves and shelf brackets
- Glass door

SOFUP-585

One Door Upright Chiller W740 D887 H2090



Capacity: 580L Power: 350W Frequency: 50/60Hz Temperature: -2~+8°C Volts: 220~240V | 1PH

Accessories Included

4 PVC-coated grid shelves



Fits 1 x 2/1 GN per shelf (GN excluded)



Packing Dimension: W760 D905 H2150 Weight: 146kg

- Environmental temperature: 43°C

- Removable door gasket
- Adjustable shelves
- Heavy-duty caster wheels with brakes

- Left-hinge door

SOFUP-1275

Two Door Upright Chiller W1420 D887 H2090



Capacity: 1270L Power: 700W Frequency: 50/60Hz Temperature: -2~+8°C Volts: 220~240V | 1PH

Accessories Included

8 PVC-coated grid shelves



Fits 1 x 2/1 GN per shelf (GN excluded)



Packing Dimension: W1445 D905 H2150 Weight: 213kg

SOFUP-585 FE

One Door Upright Freezer W740 D887 H2090



Capacity: 580L Power: 500W Frequency: 50Hz Temperature: -18~-22°C Volts: 220~240V | 1PH

Accessories Included

4 PVC-coated grid shelves



Fits 1 x 2/1 GN per shelf (GN excluded)



Packing Dimension: W760 D905 H2150 Weight: 146kg

SOFUP-1275 FE

Two Door Upright Freezer W1420 D887 H2090



Capacity: 1270L Power: 650W Frequency: 50Hz Temperature: -18~-22°C Volts: 220~240V | 1PH

8 PVC-coated grid shelves



Fits 1 x 2/1 GN per shelf (GN excluded)



Packing Dimension: W1445 D905 H2150 Weight: 213kg

Counter Chiller Series

DETAILS

- Grade 304 stainless steel interior and exterior
- Copeland touch screen thermostat
- Auto-defrosting mode
- Ventilated cooling system

OPTION

- Each door can be replaced with a set of 2 or 3 drawers that fits 1 x 1/1 GN container
- Glass door
- Marble top

SOFUC-142

Undercounter Two Door Chiller W1420 D700 H850





SOFUC-238

Door Chiller

Undercounter Four

W2380 D700 H850

Capacity: 360L Power: 320W Frequency: 50/60Hz Temperature: +2~+8°C

Accessories Included

2 epoxy-coated grid shelves



Capacity: 720L

Power: 400W

Frequency: 50/60 Hz

Temperature: +2~+8°C

Volts: 220~240V | 1PH

4 epoxy-coated grid shelves

per shelf

Fits 1 x 1/1 GN

(GN excluded)

Fits 1 x 1/1 GN

Volts: 220~240V | 1PH





(GN excluded)

- Environmental temperature: 43°C

- Removable door gasket
- Adjustable legs
- Caster wheels
- Additional shelves and shelf brackets
- Electrostatic plating

SOFUC-190

Undercounter Three Door Chiller W1900 D700 H850





Capacity: 540L Power: 400W Frequency: 50/60Hz Temperature: +2~+8°C Volts: 220~240V | 1PH

Accessories Included

3 epoxy-coated grid shelves



Fits 1 x 1/1 GN per shelf (GN excluded)



Packing Dimension: W1960 D840 H890

Counter Freezer Series

DETAILS

- Grade 304 stainless steel interior and exterior
- Copeland touch screen thermostat
- Auto-defrosting mode
- Ventilated cooling system

OPTION

- Each door can be replaced with a set of 2 or 3 drawers that fits 1 x 1/1 GN container
- Glass door
- Marble top

Undercounter Two Door Freezer W1420 D700 H850

SOFUC-142 FE





Packing Dimension: W1480 D840 H890 Weight: 120kg

Capacity: 360L Power: 495W

Frequency: 50 or 60Hz Temperature: -18~-20°C Volts: 220~240V | 1PH

Accessories Included

2 epoxy-coated grid shelves



Fits 1 x 1/1 GN per shelf (GN excluded)

- Additional shelves and shelf brackets - Electrostatic plating

- Caster wheels

- Adjustable legs

- Removable door gasket

- Environmental temperature: 43°C

SOFUC-190 FE

Undercounter Three Door Freezer W1900 D700 H850



Weight: 145kg

Capacity: 540L Power: 590W Frequency: 50 or 60Hz Temperature: : -18~-20°C Volts: 220~240V | 1PH

Accessories Included

3 epoxy-coated grid shelves



Fits 1 x 1/1 GN per shelf (GN excluded)

SOFUC-238 FE

Undercounter Four Door Freezer W2380 D700 H850





Packing Dimension: W2440 D840 H890 Weight: 170kg

Capacity: 720L Power: 400W Frequency: 50 or 60Hz Temperature: -18~-20°C Volts: 220~240V | 1PH

4 epoxy-coated grid shelves



per shelf (GN excluded)

Fits 1 x 1/1 GN



left compressor option

Packing Dimension:

W2440 D840 H890

Weight: 170kg



2 doors with 5 x 1/3 GN



3 doors with 7 x 1/3 GN



2 drawers set 3 drawers set





left compressor option



2 doors with 5 x 1/3 GN



3 doors with 7 x 1/3 GN



2 drawers set

3 drawers set







Undercounter Series

DETAILS

- Grade 304 stainless steel interior and exterior
- EVCO touch screen thermostat
- Auto-defrosting mode
- Ventilated cooling system
- Environmental temperature: 32°C

OPTION

- Electrostatic plating

SOFUC-60

Undercounter One Door Chiller W600 D600 H850





Packing Dimension: W650 D650 H970 Weight: 55kg

Capacity: 130L Power: 135W Frequency: 50/60Hz

2 pvc-coated grid shelves

Temperature: +2~+8°C Volts: 220~240V | 1PH



Packing Dimension: W650 D650 H970 Weight: 55kg

SOFUC-65 FE

Undercounter One

W650 D600 H860

Door Freezer

SOFUC-60 FE

Undercounter One

W600 D600 H850

Door Freezer

- Removable door gasket for SOFUC-60

and SOFUC-65 DR chiller and freezer

- Removable drawer track support for SOFUC-65

chiller and freezer

Capacity: 130L Power: 180W Frequency: 50 or 60Hz Temperature: -18~-20°C

Volts: 220~240V | 1PH

2 pvc-coated grid shelves

Capacity: 218L

Power: 390W

2 rail sets

 $\frac{1}{1}$

Frequency: 50 or 60Hz

Volts: 220~240V | 1PH

Temperature: -18~-20°C

Accessories Included

■ 1 pvc-coated grid shelves

Fits 1 x 1/1 GN

(GN excluded)

per shelf or

rail set

SOFUC-65

Undercounter One Door Chiller W650 D600 H860





Packing Dimension: W700 D650 H980 Weight: 65kg

Capacity: 218L Power: 310W Frequency: 50/60Hz Volts: 220~240V | 1PH Temperature: +2~+8°C

- 2 rail sets
- 1 pvc-coated grid shelves



Fits 1 x 1/1 GN per shelf or rail set (GN excluded)



SOFUC-65 FE DR2

Packing Dimension:

W700 D650 H980

Weight: 65kg

Undercounter Two **Drawer Freezer** W650 D600 H860





Capacity: 218L Power: 390W Frequency: 50 or 60Hz Temperature: -18~-20°C Volts: 220~240V | 1PH



Fits 1 x 1/1 GN per drawer (GN excluded)

 $\frac{1}{1}$

SOFUC-65 DR2 Undercounter Two Capacity: 218L

Drawer Chiller W650 D600 H860



Packing Dimension: W700 D650 H980 Weight: 70kg

Power: 310W Frequency: 50/60Hz Temperature: +2~+8°C Volts: 220~240V | 1PH



Fits 1 x 1/1 GN per drawer (GN excluded)

Bakery Series

DETAILS

- Grade 304 stainless steel interior and exterior
- Copeland digital thermostat
- Auto-defrosting mode
- Ventilated cooling system

OPTION

- Each door can be replaced with a set of 2 or 3 drawers that fits 1x 60x40 container
- Glass door
- Marble top

SOFUC-144 BK

Two Door Bakery Chiller

W1448 D760 H850





Packing Dimension: W1500 D940 H890 Weight: 130kg

Capacity: 360L Power: 480W Frequency: 50Hz Temperature: +2~+8°C Volts: 220~240V | 1PH







Fits 1 x 60x40 baking tray per bracket set (GN excluded)

- Environmental temperature: 43°C

- Removable door gasket
- Adjustable legs
- Caster wheels
- Additional shelves and shelf brackets
- Electrostatic plating

SOFUC-144 FE BK

Two Door Bakery Freezer

W1448 D760 H850



Capacity: 360L Power: 480W Frequency: 50Hz Temperature: -18~-20°C Volts: 220~240V | 1PH

12 shelf bracket sets



Fits 1 x 60x40 baking tray per bracket set (GN excluded)

SOFUC-190 BK

Three Door Bakery Chiller

W1900 D760 H850





Packing Dimension: W1960 D840 H890 Weight: 145kg

Capacity: 400L Power: 400W Frequency: 50Hz Temperature: +2~+8°C Volts: 220~240V

18 shelf bracket sets



Fits 1 x 60x40 baking tray per bracket set (GN excluded)

SOFUC-190 FE BK Three Door Bakery

Freezer W1900 D760 H850





Packing Dimension: W1960 D840 H890 Weight: 145kg

Capacity: 400L Power: 550W Frequency: 50Hz Temperature: -18~-20°C

Volts: 220~240V

■ 18 shelf bracket sets



Fits 1 x 60x40 baking tray per bracket set (GN excluded)

left compressor option



Refrigerated Well Series

DETAILS

- Grade 304 stainless steel interior and exterior
- EVCO touch screen thermostat
- Auto-defrosting mode

- Static cooling system
- Environmental temperature: 32°C

OPTION

- Glass lid

SOFRW-98

Refrigerated Well W980 D395 H270+350





Packing Dimension: W1060 D470 H470 Weight: 47kg

Capacity: 2 x 1/3 GN container and 1 x 1/2 GN container

Power: 170W Frequency: 50/60Hz Temperature: +2~+6°C Volts: 220~240V | 1PH



Fits 2 x 1/3 GN and 1 x 1/2 GN (GN excluded)

SOFRW-120

Refrigerated Well W1200 D395 H270+350






Packing Dimension: W1290 D470 H470 Weight: 55kg

Capacity: 3 x 1/3 GN container and 1 x 1/2 GN container

Power: 170W Frequency: 50/60Hz Temperature: +2~+6°C Volts: 220~240V | 1PH



Fits 3 x 1/3 GN and 1 x 1/2 GN (GN excluded)

SOFRW-142

Refrigerated Well W1420 D395 H270+350





Packing Dimension: W1500 D470 H470 Weight: 61kg

Capacity: 6 x 1/3 GN container

Power: 170W Frequency: 50/60Hz Temperature: +2~+6°C Volts: 220~240V | 1PH



Fits 6 x 1/3 GN (GN excluded)

SOFRW-190

Refrigerated Well W1900 D395 H270+350





Capacity: $7 \times 1/3$ GN container and $1 \times 1/2$ GN container

Power: 170W Frequency: 50/60Hz Temperature: +2~+6°C Volts: 220~240V | 1PH



Fits 7 x 1/3 GN and 1 x 1/2 GN (GN excluded)



CORE LINE CHILLER AND FREEZER

Upright Series

DETAILS

- Grade 304 stainless steel interior and exterior
- Copeland digital thermostat
- Auto-defrosting mode
- Ventilated cooling system
- Environmental temperature: 35°C

OPTION

- Additional shelves and shelf brackets

- Removable door gasket
- Adjustable shelves
- Heavy-duty caster wheels with brakes
- Free-welding process

COREUP-600

One Door Upright Chiller W660 D830 H2050



Capacity: 600 L Power: 280W Frequency: 50Hz Temperature: 0~+10°C Volts: 220~240V | 1PH

Accessories Included

3 PVC-coated grid shelves



Fits 1 x 2/1 GN per shelf (GN excluded)



Packing Dimension: W720 D890 H2100 Weight: 105kg

COREUP-1200

Two Door Upright Chiller W1330 D830 H2050



Capacity: 1200L Power: 380W Frequency: 50Hz Temperature: 0~+10°C Volts: 220~240V | 1PH

Accessories Included

6 PVC-coated grid shelves



Fits 1 x 2/1 GN per shelf (GN excluded)



Packing Dimension: W1390 D890 H2100 Weight: 165kg

COREUP-600 FE

One Door Upright Freezer W660 D830 H2050



Capacity: 600L Power: 510W Frequency: 50Hz Temperature: -18~-20°C Volts: 220~240V | 1PH

Accessories Included

3 PVC-coated grid shelves



Fits 1 x 2/1 GN per shelf (GN excluded)



Packing Dimension: W720 D890 H2100 Weight: 105kg

COREUP-1200 FE

Two Door Upright Freezer W1330 D830 H2050



Capacity: 1200L Power: 750W Frequency: 50Hz Temperature: -18~-20°C Volts: 220~240V | 1PH

Accessories Included

6 PVC-coated grid shelves



Fits 1 x 2/1 GN per shelf (GN excluded)

Packing Dimension: W1390 D890 H2100
Weight: 165kg

*50 or 60 Hz

Undercounter Series

DETAILS

- Grade 304 stainless steel interior and exterior
- Copeland digital thermostat
- Auto-defrosting mode
- Ventilated cooling system

OPTION

- Each door can be replaced with a set of 2 or 3 drawers that fits 1 x 1/1 GN container

- Environmental temperature: 35°C
- Removable door gasket
- Free-welding process

- Additional shelves and shelf brackets

COREUC-125

Undercounter Two Door Chiller W1250 D700 H850





Packing Dimension: W1310 D760 H890 Weight: 90kg

Capacity: 280L Power: 220W Frequency: 50Hz Temperature: 0~+10°C Volts: 220~240V | 1PH

Accessories Included

2 PVC-coated grid shelves



Fits 1 x 1/1 GN per shelf (GN excluded)





Packing Dimension: W1310 D760 H890

COREUC-125 FE

Undercounter Two Door Freezer W1250 D700 H850

Weight: 90kg

Capacity: 280L Power: 410W Frequency: 50Hz Temperature: -18~-20°C Volts: 220~240V | 1PH

Accessories Included

2 PVC-coated grid shelves



Capacity: 480L

Frequency: 50Hz

Power: 428W

Fits 1 x 1/1 GN per shelf (GN excluded)

COREUC-170

Undercounter Three Door Chiller W1700 D700 H850





Packing Dimension: W1760 D760 H890 Weight: 125kg

Capacity: 480L Power: 250W Frequency: 50Hz Temperature: 0~+10°C Volts: 220~240V | 1PH

Accessories Included

3 PVC-coated grid shelves



Fits 1 x 1/1 GN per shelf (GN excluded)



Packing Dimension: W1760 D760 H890 Weight: 125kg

COREUC-170 FE

Undercounter Three Door Freezer W1700 D700 H850



Temperature: -18~-20°C

Volts: 220~240V | 1PH

3 PVC-coated grid shelves



Fits 1 x 1/1 GN per shelf (GN excluded)

left compressor option



*50 or 60 Hz

2 drawers set 3 drawers set







DETAILS

- Grade 304 stainless steel interior and exterior
- Copeland touch screen thermostat
- Auto-defrosting mode
- Ventilated cooling system

- Environmental temperature: 43°C
- Removable door gasket
- Adjustable shelves
- Heavy-duty caster wheels with brakes

AMERICAN LINE

CHILLER AND FREEZER

AMLUC-130

Undercounter One Door Chiller W705 D760 H907





Capacity: 198L Power: 300W Frequency: 50/60Hz Temperature: 0~+5°C Volts: 220~240V | 1PH

Undercounter Chiller Series

Accessories Included

1 PVC-coated grid shelf

AMLUC-230

Undercounter Two Door Chiller W1225 D760 H907



Packing Dimension: W1265 D800 H1200 Weight: 146kg Capacity: 285L Power: 300W Frequency: 50/60Hz Temperature: 0~+5°C Volts: 220~240V | 1PH

Accessories Included

2 PVC-coated grid shelves

AMLUC-320

Undercounter Two Door Chiller W1555 D760 H907





Packing Dimension: W1595 D800 H1200 Weight: 169kg Capacity: 370L Power: 450W Frequency: 50/60Hz Temperature: 0~+5°C Volts: 220~240V | 1PH

Accessories Included

2 PVC-coated grid shelves

Undercounter Three Door Chiller W1822 D760 H907

AMLUC-380



Packing Dimension: W1862 D800 H1200 Weight: 185kg Capacity: 549L Power: 500W Frequency: 50/60Hz Temperature: 0~+5°C Volts: 220~240V | 1PH

Accessories Included

3 PVC-coated grid shelves

Salad & Sandwich Counter Series

DETAILS

- Grade 304 stainless steel interior and exterior
- Copeland touch screen thermostat
- Auto-defrosting mode
- Ventilated cooling system

AMLSC-130

One Door Salad Counter W735 D760 H1100



Packing Dimension: W775 D800 H1200 Weight: 102kg Capacity: 198L Power: 300W Frequency: 50/60Hz Temperature: 0~+5°C Volts: 220~240V | 1PH

Accessories Included

- 8 1/6x100mm BPA free polycarbonate GN pans
- chopping board




■ 1 PVC-coated grid shelf

- Environmental temperature: 43°C

- Removable door gasket
- Adjustable shelves
- Heavy-duty caster wheels with brakes

AMLSC-230

Two Door Salad Counter W1225 D760 H1100



Accessories Included

- 12 1/6x100mm BPA free polycarbonate GN pans
- chopping board



2 PVC-coated grid shelves

AMLSC-320

Two Door Salad Counter W1555 D760 H1100



Packing Dimension: W1595 D800 H1200 Weight: 169kg Capacity: 370L Power: 450W Frequency: 50/60Hz Temperature: 0~+5°C Volts: 220~240V | 1PH

Accessories Included

- 16 1/6x100mm BPA free polycarbonate GN pans
- chopping board



2 PVC-coated grid shelves

AMLSC-380

Three Door Salad Counter W1822 D760 H1100

Packing Dimension:

W1265 D800 H1200

Weight: 146kg




V



Packing Dimension: W1862 D800 H1200 Weight: 185kg Capacity: 549L Power: 500W Frequency: 50/60Hz Temperature: 0~+5°C Volts: 220~240V | 1PH

Accessories Included

- 18 1/6x100mm BPA free polycarbonate GN pans
- chopping board



3 PVC-coated grid shelves



VARIABLE TEMPERATURE

DRAWER

Variable Temperature Drawer Series

DETAILS

- Grade 304 stainless steel interior and exterior
- Copeland digital thermostat
- Auto-defrosting mode
- Ventilated cooling system
- Environmental temperature: 43°C

- Removable drawer gasket
- Heavy-duty caster wheels with brakes
- Each drawer can be set to chiller (+2~+8°C) or freezer (-18~-20°C) mode.

SOFVD-90 2GN

Undercounter One Drawer W905 D700 H600

> +2~+8°C/-18~-20°C Volts: 220V



Capacity: 55L

Power: 240W

Temperature:

Frequency: 50/60Hz

Fits 2 x 1/1 GN per drawer (GN excluded)

SOFVD-90 4GN

Undercounter Two Drawer W905 D700 H865

W905 D700 H86



Packing Dimension: W980 D760 H1040 Weight: 125kg Capacity: 111L Power: 460W Frequency: 50/60Hz Temperature: +2~+8°C/-18~-20°C Volts: 220V



Fits 2 x 1/1 GN per drawer (GN excluded)

SOFVD-123 3GN

Undercounter One Drawer W1230 D700 H600



Packing Dimension:

W980 D760 H745

Weight: 82kg



Packing Dimension: W1300 D760 H745 Weight: 105kg Capacity: 84L Power: 270W Frequency: 50/60Hz Temperature: +2~+8°C/-18~-20°C Volts: 220V



Fits 3 x 1/1 GN per drawer (GN excluded)

SOFVD-123 6GN

Undercounter Two Drawer W1230 D700 H865

/-18~-20°C 0V



Packing Dimension: W1300 D760 H1040 Weight: 154kg Capacity: 168L Power: 500W Frequency: 50/60Hz Temperature: +2~+8°C/-18~-20°C Volts: 220V



Fits 3 x 1/1 GN per drawer (GN excluded)

Blast Series

DETAILS

- Grade 304 stainless steel interior and exterior
- EVCO HACCP LCD touch screen controller
- Auto-defrosting mode
- Ventilated cooling system
- Environmental temperature: 32°C

- Removable door gasket
- With food core probe
- 40 Kg/M³ Ecology friendly insulation material
- Blast Chilling: Max 1.5 hours from +90°C to +3°C
- Blast Freezing: Max 4.0 hours from +90°C to -18°C

SOFBCF-3

Blast Chiller-Freezer W710 D700 H560





Capacity: 56L/3 trays Power: 650W Frequency: 50 or 60Hz Temperature: -35~+3°C Volts: 220~240V | 1PH

Accessories Included

3 shelf bracket sets

Fits 1 1/1 GN container or 1 x 60x40 baking tray 1/1 per bracket set

(GN and tray excluded)

W800 D800 H850

Blast Chiller-Freezer

SOFBCF-4

Packing Dimension: W860 D860 H880 Weight: 105kg

Capacity: 94L/4 trays Power: 750W Frequency: 50 or 60Hz Temperature: -40~+3°C

Volts: 220~240V | 1PH

Accessories Included

4 shelf bracket sets



Fits 1 1/1 GN container or 1 x 60x40 baking tray per bracket set (GN and tray excluded)

SOFBCF-10

Blast Chiller-Freezer W800 D800 H1385



Packing Dimension: W860 D860 H1415 Weight: 145kg

Capacity: 209L/10 trays Power: 1280W Frequency: 50 or 60Hz Temperature: -40~+3°C Volts: 220~240V | 1PH

10 shelf bracket sets

Fits 1 1/1 GN container or 1 x 60x40 baking tray per bracket set (GN and tray excluded)

SOFBCF-15

Blast Chiller-Freezer W800 D800 H1920



Packing Dimension: W860 D860 H1950 Weight: 190kg

Capacity: 305L/15 trays Power: 2260W Frequency: 50 or 60Hz Temperature: -40~+3°C

Volts: 220~240V | 1PH

15 shelf bracket sets

Fits 1 1/1 GN container or 1 x 60x40 baking tray per bracket set (GN and tray excluded)

BLAST CHILLER-FREEZER

Roll-in Blast Series

DETAILS

- Grade 304 stainless steel interior and exterior
- EVCO HACCP LCD touch screen controller
- Auto-defrosting mode
- Ventilated cooling system
- Environmental temperature: 32°C

- Removable door gasket
- With food core probe
- 40 Kg/M³ Ecology friendly insulation material
- Blast Chilling: Max 1.5 hours from +75°C to +3°C
- Blast Freezing: Max 4.0 hours from +75°C to -18°C

BUILT-IN

SOFBCF-15 P

Plug-in Roll-in Blast Chiller-Freezer W1000 D880 H2350



Packing Dimension: W1060 D940 H2560 Weight: 310kg

Capacity: 540L/15 trays Power: 3200W Frequency: 50 or 60Hz Temperature: -40~+3°C Volts: 380~400V | 3PH

Accessories Included

■ 1 trolley and 1 ramp



or trolley

trolley



60x40 GN

SOFBCF-30 P

Plug-in Roll-in Blast Chiller-Freezer 30 Trays W1300 D1080 H2350





Packing Dimension: W1360 D1140 H2560 Weight: 330kg

Capacity: 950L/30 trays Power: 4000W Frequency: 50 or 60Hz Temperature: -40~+3°C Volts: 380~400V | 3PH

Accessories Included

■ 1 trolley and 1 ramp



trolley





60x40 GN

REMOTE

SOFBCF-20 R

Remote Roll-in Blast Chiller-Freezer W1000 D880 H2050



Packing Dimension: Cooling system unit: W1200 D800 H1000 Cabinet: W1060 D940 H2110 Weight: 275kg

Capacity: 605L/20 trays Power: 3200W Frequency: 50Hz Temperature: -40~+3°C Volts: 380~400V | 3PH



■ 1 trolley and 1 ramp









Packing Dimension: Cabinet:

Weight: 290kg

SOFBCF-40 R

Remote Roll-in Blast Chiller-Freezer W1300 D1080 H2050



Cooling system unit: W1200 D800 H1000 W1360 D1140 H2110

Capacity: 1045L/40 trays Power: 4000W Frequency: 50Hz Temperature: -40~+3°C Volts: 380~400V | 3PH

Accessories Included

■ 1 trolley and 1 ramp



trolley









SLIM LINE AND DUAL **TEMPERATURE**

Slim Line And Dual Temperature Series

DETAILS

- Grade 304 stainless steel interior and exterior
- Copeland touch screen thermostat
- Auto-defrosting mode
- Ventilated cooling system
- Environmental temperature: 32°C for slim line 43°C for dual temperature

- Removable door gasket

- Adjustable shelves
- Heavy-duty caster wheels with brakes

OPTION

- Additional shelves and shelf brackets

- Caster wheels can be changed into legs

SOFSL-484

Slim Line Chiller W484 D735 H2000



Capacity: 350L Power: 170W Frequency: 50 or 60Hz Temperature: -2~+8°C Volts: 220~240V | 1PH

Accessories Included

3 PVC-coated grid shelves



Fits 1 x 1/1 GN per shelf (GN excluded)

SOFSL-484 FE

Slim Line Chiller Freezer W484 D735 H2000



Capacity: 350L Power: 440W Frequency: 50 or 60Hz Temperature: -18~-22°C Volts: 220~240V | 1PH

Accessories Included

3 PVC-coated grid shelves



Fits 1 x 1/1 GN per shelf (GN excluded)





Packing Dimension: W515 D765 H2070 Weight: 123kg

SOFDTCF-680

Dual Temperature Half Chiller-Freezer W680 D845 H1990



Capacity: 128.5L (chiller) / 128.5L (freezer) Power: 900W

Frequency: 50 or 60Hz

Temperature: -2~+8°C/-18~-22°C

Volts: 220V | 1PH

Accessories Included

4 PVC-coated grid shelves




Fits 2 x 1/1 GN per shelf (GN excluded)



Ultra Low Temperature Freezer **Features**

ULTRA LOW TEMPERATURE FREEZER

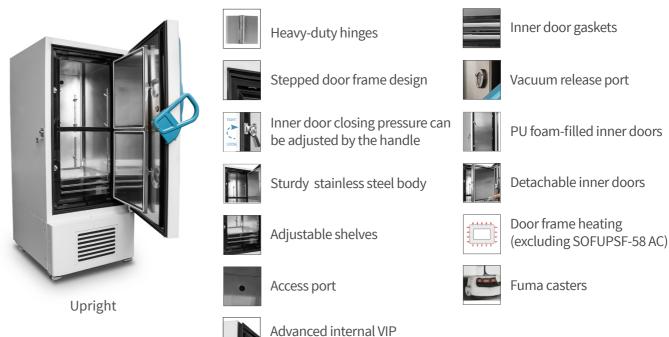





Microcomputer temperature





Heavy-duty hinges



Sturdy steel body with thick

Access port



Buckle with padlock port



Hoverable top lid

Ergonomic handle



Caster wheels with brake

Chest

Upright Ultra Low Temperature Series

DETAILS

- Grade 304 stainless steel interior and color sprayed steel exterior
- Precise touch screen thermostat for SOFUPSF-58 AC and Intelligent touch screen thermostat for SOFUPSF-340 AC, 408 AC, 588 AC and 838 C
- Cascade cooling system for SOFUPSF-838 C and Auto-cascade cooling system for SOFUPSF-58 AC, 340 AC, 408 AC and 588 AC
- Removable door gasket

- Fuma casters
- Advanced thermal insulation
- Super-cooling technology -86°C
- Multi-layer sealing design
- Eco-friendly and energy efficient
- 10 types of alarm
- 72 hours of power failure backup

Capacity: 340L

Frequency: 50 or 60Hz

Temperature: -40~-86°C

Power: 810W

Volts: 220V

Capacity: 588L

AUTO-CASCADE

SOFUPSF-58 AC

Ultra Low Temperature Freezer W635 D819 H1212



Temperature: -40~-86°C

Capacity: 58L Power: 442W Frequency: 50 or 60Hz Volts: 220V





SOFUPSF-340 AC

W854 D1072 H1907

Ultra Low Temperature Freezer



Packing Dimension: W935 D1070 H2128 Weight: 284.5kg

SOFUPSF-408 AC

Ultra Low Temperature Freezer W891 D992 H1946

Weight: 146kg

Packing Dimension: W730 D845 H1400

Packing Dimension: W954 D955 H2094




Power: 890W Frequency: 50 or 60Hz Temperature: -40~-86°C Volts: 220V

Capacity: 408L



SOFUPSF-588 AC

Ultra Low Temperature Freezer



Packing Dimension: W970 D1138 H2195 Weight: 345.5kg

CASCADE

SOFUPSF-838 C

Ultra Low Temperature Freezer W1179 D1135 H1994.5

Weight: 279.5kg



Capacity: 838L Power: 720W Frequency: 50 or 60Hz Temperature: -40~-86°C Volts: 220V

Packing Dimension: W1262 D1098 H2185 Weight: 430kg

Chest Ultra Low Temperature Series

DETAILS

- Grade 304 stainless steel interior and color sprayed steel exterior
- Copeland digital thermostat
- Removable door gasket
- Heavy-duty caster wheels with brakes
- Advanced thermal insulation

- Super-cooling technology -86°C
- Multi-layer sealing design
- Eco-friendly and energy efficient
- 3 to 4 types of alarm
- 72 hours of power failure backup

SOFCSF-105

Ultra Low Temperature Freezer W686 D694 H942







Weight: 70kg

Capacity: 105L Power: 500W Frequency: 50 or 60Hz Temperature: -40~-86°C

Volts: 220V

Packing Dimension: W770 D705 H1090

SOFCSF-485

Ultra Low Temperature Freezer W1695 D840 H962



Capacity: 485L Power: 670W Frequency: 50 or 60Hz Temperature: -40~-86°C Volts: 220V



Packing Dimension: W1765 D900 H1060 Weight: 150kg

WINE COOLER

Wine Cooler Series

DETAILS

- Grade 304 stainless steel interior and exterior
- Copeland digital thermostat for SOFWC-45 and Elitech thermostat for SOFWCD-110
- Auto-defrosting mode
- Static cooling system

OPTIONS

- Left-hinge door (for dual zone only)

- LED lighting (461nm dim blue light)
- UV resistant double-glazed tempered glass door
- Adjustable shelves
- Low noise

SOFWC-45

Undercounter Wine Cooler W600 D585 H860

Capacity: 45 bottles Power: 100W Frequency: 50/60Hz Temperature: +5~+18°C

Volts: 220V



4 white oak wooden shelves



Packing Dimension: W680 D650 H1030 Weight: 59kg

DUAL ZONE

SOFWCD-110

Wine Cooler Dual Zone W600 D602.5 H1860



Capacity: 55+55 bottles Power: 126W

Frequency: 50/60 Hz

Temperature: +5~+18°C/+12~+22°C

Volts: 220~240V

Accessories Included

■ 10 white oak wooden shelves



Packing Dimension: W680 D650 H2030 Weight: 108kg

DRY **AGER**

Dry Ager Series

DETAILS

- Grade 304 stainless steel interior and exterior
- Digital temperature control and display
- Auto-defrosting mode
- Ventilated cooling system
- Environmental temperature: 32°C
- LED lighting

OPTION (Applicable to SOFDA-1 to 3 only)

- Color





SOFDA-1

One Door Dry Ager W700 D750 H2000



Capacity: 450L Power: 500W Frequency: 50Hz Temperature: -5~+25°C Volts: 220~240V | 1PH

Accessories Included

- 5 stainless steel grid shelves
- 1 Himalayan salt brick



Packing Dimension: W760 D810 H2050 Weight: 155kg

SOFDA-3

Three Door Dry Ager W1800 D750 H2000



Capacity: 1450L Power: 1000W Frequency: 50Hz Temperature: -5~+25°C Volts: 220~240V | 1PH

Accessories Included

- 15 stainless steel grid shelves
- 3 Himalayan salt bricks



Packing Dimension: W1860 D810 H2050 Weight: 375kg

- Insulated tempered glass doors with removable gasket
- Adjustable shelves
- UVC sterilization
- Humidity range 60-90%
- Requires a water and drainage connection
- Grade 304 stainless steel interior and exterior only for color Grey

SOFDA-2

Two Door Dry Ager W1200 D750 H2000



Capacity: 950L Power: 800W Frequency: 50Hz Temperature: -5~+25°C Volts: 220~240V | 1PH

- 10 stainless steel grid shelves
- 2 Himalayan salt bricks



Packing Dimension: W1260 D810 H2050 Weight: 265kg

PLUG AND PLAY

SOFDA-400

One Door Dry Ager W700 D800 H1650



Capacity: 400L Power: 160W Frequency: 50 or 60Hz Temperature: +1~+4°C Volts: 220~240V

Accessories Included

- 3 stainless steel shelves
- 2 stainless steel S hooks
- 2 stainless steel hanger
- 1 Himalayan salt brick

Packing Dimension: W770 D840 H1860 Weight: 122kg

MEAT HANGING CHILLER

Meat Hanging Chiller Series

DETAILS

- Grade 304 stainless steel interior and exterior
- Copeland touch screen thermostat
- Auto-defrosting mode
- Static cooling system

- Environmental temperature: 38°C
- LED lighting (6000 Kelvin bright cool white)
- Removable door gasket
- Heavy-duty caster wheels with brakes

SOFMCGD-1400

Meat Hanging Chiller W1420 D947 H2100



Capacity: 1175L Power:550W Temperature: -2~+8°C Frequency: 50Hz Volts: 220~240V | 1PH

Accessories Included

- 4 stainless steel shelves
- 1 stainless steel meat rail



Packing Dimension: W1455 D905 H2150 Weight: 198kg

GRAB AND GO

Grab and Go series

DETAILS

- Grade 304 stainless steel interior and exterior
- Copeland digital thermostat
- Auto-defrosting mode
- Ventilated cooling system
- Environmental temperature: 32°C

- LED lighting (6500 Kelvin bright cool white)
- Double-glazed curved glass
- Adjustable shelves
- Heavy-duty caster wheels with brakes

SOFGG-90-3

Grab And Go W900 D900 H1360



Capacity: 290L Power: 350W Frequency: 50 or 60Hz Temperature: +5~+10°C Volts: 220~240V

Accessories Included

- 3 glass shelves
- 1 night curtain

Packing Dimension: W1010 D890 H1515 Weight: 220kg

SOFGG-920

Grab And Go W920 D770 H1320



Capacity: 320L Power: 950W Frequency: 50/60 Hz Temperature:+2~+8°C Volts: 220V

Accessories Included

- 3 glass shelves
- 1 night curtain



Packing Dimension: W1020 D870 H1450

BANQUET **TROLLEY**

Banquet Trolley Series

DETAILS

- Grade 304 stainless steel interior and exterior
- Copeland digital thermostat
- Auto-defrosting mode for coolers
- Ventilated cooling system for coolers
- Environmental temperature: 32°C

- Removable door gasket
- 40 Kg/M³ Ecology friendly insulation material
- Adjustable shelves
- Heavy-duty caster wheels with brakes
- Low noise fan motor

COOLER-

SOFBOC-8

One Door Banquet Cart Cooler W810 D885 H1980



Capacity: 560L/8 trays Power: 270W Frequency: 50 or 60Hz Temperature: 0~+10°C Volts: 220~240V

Accessories Included

8 PVC-coated grid shelves



Fits 1 x 2/1 GN per shelf (GN excluded)



Packing Dimension: W870 D940 H2050 Weight: 136kg

SOFBQC-16

Two Door Banquet Cart Cooler W1480 D885 H1980



Capacity: 1200L/16 trays Power: 350W Frequency: 50 or 60Hz Temperature: 0~+10°C Volts: 220~240V

Accessories Included

16 PVC-coated grid shelves



Fits 1 x 2/1 GN per shelf (GN excluded)



Packing Dimension: W1540 D940 H2050 Weight: 214kg

WARMER

SOFBOW-8

One Door Banquet Cart Warmer W810 D885 H1980



Capacity: 650L / 8 trays Power: 500W Frequency: 50/60 Hz Temperature: +60~+80°C Volts: 220~240V

Accessories Included

8 PVC-coated grid shelves



Fits 1 x 2/1 GN per shelf (GN excluded)



Packing Dimension: W870 D940 H2050 Weight: 130kg

SOFBQW-16

Two Door Banquet Cart Warmer W1480 D885 H1980



Capacity: 1400L/16 trays Power: 1000W Frequency: 50/60 Hz Temperature: +60~+80°C Volts: 220~240V

Accessories Included

■ 16 PVC-coated grid shelves



Fits 1 x 2/1 GN per shelf (GN excluded)



Packing Dimension: W1540 D940 H2050 Weight: 208kg

SOLID WASTE COOLER

Solid Waste Cooler Series

DETAILS

- Grade 304 stainless steel interior and exterior
- Copeland digital thermostat
- Auto-defrosting mode
- Ventilated cooling system

- Environmental temperature: 43°C
- Removable door gasket
- Prevents unpleasant odors and contamination in kitchens

BUILT-IN

SOFSWC-120

One Door Solid Waste Cooler W837 D740 H1094



Capacity: 1 x 120L bin Power: 341W Frequency: 50/60 Hz Temperature: +4~+10°C Volts: 220V



Fits 1 x 120L bin (bin excluded)



SOFSWC2-120

Two Door Solid Waste Cooler W1422 D750 H1094



Capacity: 2 x 120L bin Power: 341W Frequency: 50/60 Hz Temperature: +4~+10°C Volts: 220V



(bin excluded)



Packing Dimension: W1490 D770 H1220 Weight: 136kg

MONOBLOCK

SOFSWC-240

One Door Solid Waste Cooler W997.5 D921 H1232



Capacity: 1 x 240L bin Power: 341W Frequency: 50/60 Hz Temperature: +4~+10°C Volts: 220V



Fits 1 x 240L bin (bin excluded)



Packing Dimension: W1060 D985 H1360 Weight: 135kg

SOFSWC2-240

Two Door Solid Waste Cooler W1717.5 D921 H1232



Capacity: 2 x 240L bin Power: 341W Frequency: 50/60 Hz Temperature: +4~+10°C Volts: 220V



Fits 2 x 240L bin (bin excluded)



Packing Dimension: W1780 D985 H1360 Weight: 181kg

ramp included



BESPOKE SOLUTIONS

CAKE AND SWEETS DISPLAY











SUSHI AND FISH DISPLAY









BESPOKE REFRIGERATION






ELECTROSTATIC PLATED STAINLESS STEEL











GRILLS





VIBRATION-FINISH STAINLESS STEEL





PIZZA OVEN





Certifications & Standards

Sofia Refrigeration adheres to the best global standards to assure the safety, quality, and dependability of all kitchen equipment we offer. Our products have been tested and certified to satisfy international standards for performance and safety.





Conforms to EU health, safety, and environmental protection regulations.



Free from hazardous substances as per EU directive.



Complies to provide a safe and healthy workplace by preventing work-related injuries and improving overall safety performance.



Certified quality management system ensuring consistent product quality.



Improves refrigerator insulation, increases energy efficiency, and supports environmental sustainability.

