



A close-up photograph of a worker's hand wearing a red knitted glove, holding a long, thin metal rod. The rod is being used to bend a piece of metal on a machine. The machine has a series of rollers and a black handle. In the background, there is a rack with many small metal parts. The lighting is dramatic, with strong highlights and shadows.

Amber
INDUSTRIES



4-19

Cooking Line

Gas Fryer
Charbroiler
Manual Chrome Griddle
Thermostatic Chrome Griddle
Gas Range Burner
Hot Plate Burner
Stockpot Range
Gas Salamander
Electric Convection Oven

20-25

Induction Ranges

Induction Cooker
Induction Wok Cooker
Double Hob Induction Cooker
Induction Drop-In Cooker
Concealed Induction Cooker
Induction Fryer

26-29

Snack line

Salamander
Bain Marie
Fry Warmer

30-39

Industrial Taps

Glass Rinser with Base
Middle Spray Glass Rinser
Dual Spray Glass Rinser
Single Base Sensor Faucet
Deck Mounted Pre-rinse Faucet
Double-Base Faucet With Swing Spout
Wall Mounted Faucet With Swing Spout
Hand Wash Basin Faucet- Long Spout
Hand Wash Basin Faucet- Short Spout
Single Base Faucet With Swing Spout
Overflow Pipe
Hose Reel
Dipper Well With Faucet

40-43

Sinks

Knee Operated Handwash Sink
Insertion Handwash Round Sink
Stainless Steel Mop Sink

44-49

Perin Sinks

Large Bowl Sink
Single Bowl Sink
Double Bowl Sink
Single Bowl Sink on Right Drain
Single Bowl Sink on Left Drain
Double Bowl Sink on Right Drain
Double Bowl Sink on Left Drain and Right Drain
Three Bowl Sink
Vegetable Preparation Table
Pressed Bowl

50-53

Decorative Lamp & Strip Heaters

Kitchen Hood Light
Heatlamp

54-57

Trolley

Serving Trolley 2 layer
Serving Trolley 3 layer
GN Trolley-15 Tiers 60x40
GN Trolley-15 Tiers 1/1
GN Trolley-15 Tiers 2/1

58-61

European GN Tray

GN Tray Models

62-71

Accessories

Amber Adjusted Feet
Amber Leg Bush
3 inch Caster Wheels With & Without Brake
4 inch Caster Wheels With & Without Brake
5 inch Caster Wheels With & Without Brake
SS Grease Filter (Baffle filter)
Oil Filter with Ears (Baffle Filter)
Magnet
Hinges
Handle
Flange
Louvers
Bracket
Angel
Floor grating 30x30 Side Drain
Floor grating 60*30 Side Drain
Floor grating 100*30 Side Drain
Floor grating 30x30
Floor grating 60x30
Floor grating 100X30
Knock out Drawer
Fulterer Rail Set
Chopping Board

Cooking line



Gas Fryer

Single Tank

AMBGF-1



Split Tank

AMBGF-2



One Large Tank

AMBGF-1L




Details

- Stainless steel exterior
- Tube fire burner for rapid oil heating and faster temperature recovery
- Large cool zone reduces food taste transfer and longer clean oil
- Pressure blasted (peened) fry tank
- Snap acting millivolt thermostat control with overheat protection, automatic shut off at 237 °C
- 1 1/4" forward slanted drain valve for rapid oil draining
- 2 nickel plated baskets with removable stainless steel basket hanger
- Magnetic stainless steel door with handle
- Four adjustable legs (190-220mm) Optional: Caster wheels

Single Tank

Specifications


Model	AMBGF-1
Exterior Dim. WxDxH (mm)	394x786.5x1181
Tank	1
Oil Capacity (L)	20-23
Burner	4
Temperature Control Range (°C) ..	+93-+205
Total Rate BTU/hr	120,000
Manifold Gas Pressure.	NG 4"W.C. 10mbar LP 10"W.C. 25mbar NG #39 LP #52
Orifice Size	1
Required Gas Connection	1

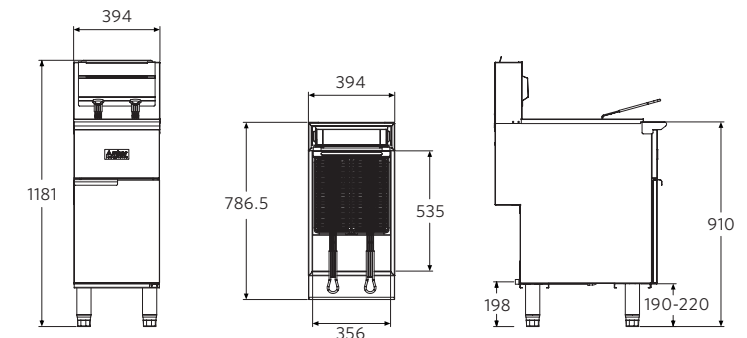

Split Tank

Specifications


Model	AMBGF-2
Exterior Dim. WxDxH (mm)	534x890.6x1181
Tank	2 Split
Oil Capacity (L)	(18-19)*2
Burner	4
Temperature Control Range (°C) ..	+93-+205
Total Rate BTU/hr	120,000
Manifold Gas Pressure.	NG 4"W.C. 10mbar LP 10"W.C. 25mbar NG #39 LP #52
Orifice Size	2
Required Gas Connection	2

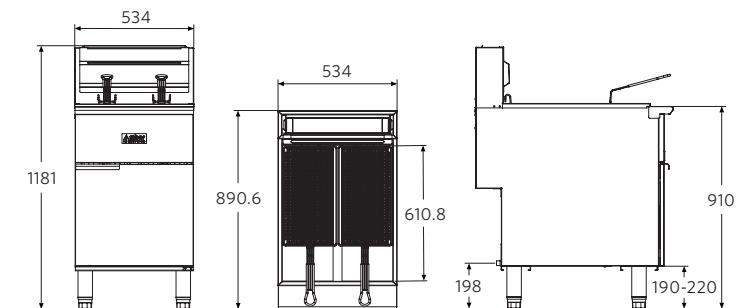

One Large Tank

Specifications

Model	AMBGF-1L
Exterior Dim. WxDxH (mm)	534x890.6x1181
Tank	1 large
Oil Capacity (L)	36-42
Burner	5
Temperature Control Range (°C) ..	+93-+205
Total Rate BTU/hr	150,000
Manifold Gas Pressure.	NG 4"W.C. 10mbar LP 10"W.C. 25mbar NG #39 LP #52
Orifice Size	1
Required Gas Connection	1

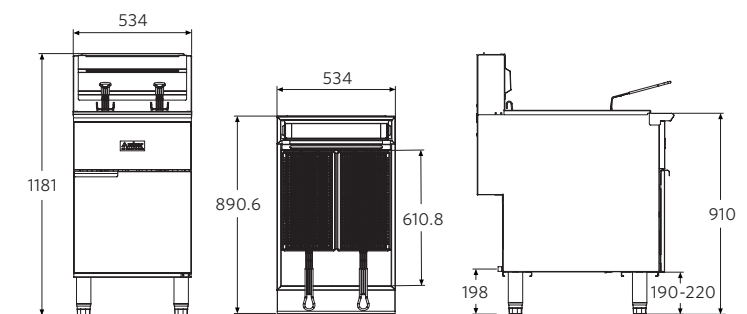

Charbroiler

18"

AMBCB-18



24"

AMBCB-24



36"

AMBCB-36



48"

AMBCB-48




Details

- Straight cast iron burner for even heat distribution at every 6"
- Reversible cast iron grates for level or inclined broiling position
- Removable cast iron radiant
- 3" fully welded stainless steel splash guard
- 4" stainless steel landing ledge with a bull nose design
- Zinc cast and chrome plated knobs
- Continuous and adjustable standing pilot for instant ignition
- Full width grease tray
- 3" grease trough
- Adjustable and non-skid feet (60-80mm)

18"

Specifications


Model	AMBCB-18
Exterior Dim. WxDxH (mm) .	457x739x343
Burner	2
Total Rate BTU/hr	40,000
Manifold Gas Pressure.	NG 4"W.C. 10mbar LP 10"W.C. 25mbar
Orifice Size	NG #45 LP #54

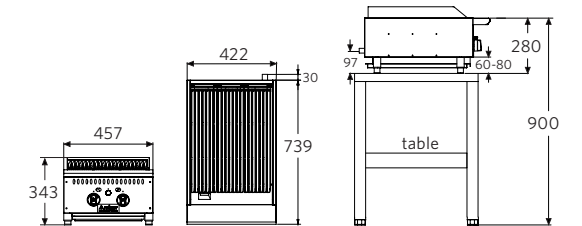

24"

Specifications


Model	AMBCB-24
Exterior Dim. WxDxH (mm) .	610x739x343
Burner	4
Total Rate BTU/hr	80,000
Manifold Gas Pressure.	NG 4"W.C. 10mbar LP 10"W.C. 25mbar
Orifice Size	NG #45 LP #54

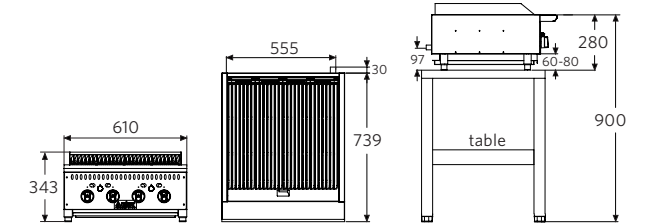

36"

Specifications


Model	AMBCB-36
Exterior Dim. WxDxH (mm) .	910x739x343
Burner	6
Total Rate BTU/hr	120,000
Manifold Gas Pressure.	NG 4"W.C. 10mbar LP 10"W.C. 25mbar
Orifice Size	NG #45 LP #54

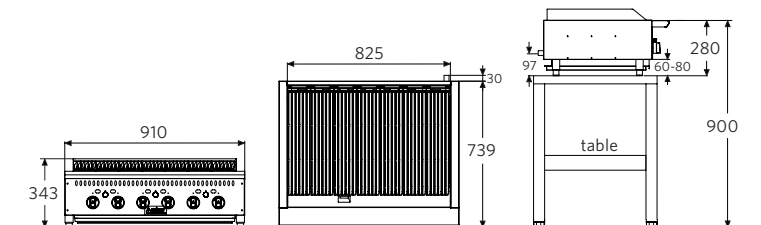

48"

Specifications

Model	AMBCB-48
Exterior Dim. WxDxH (mm) .	1210x739x343
Burner	8
Total Rate BTU/hr	160,000
Manifold Gas Pressure.	NG 4"W.C. 10mbar LP 10"W.C. 25mbar
Orifice Size	NG #45 LP #54

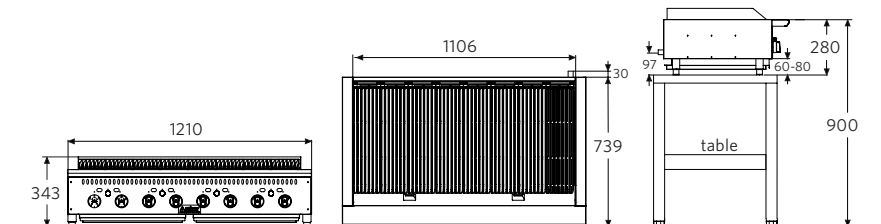

Manual Chrome Griddle

12"

AMBMG-12



24"

AMBMG-24



36"

AMBMG-36



48"

AMBMG-48



Details


- Chrome plated stainless steel exterior
- 4" Chrome plated stainless steel landing ledge with a bull nose design and 3" fully welded splash guard
- 3/4" thick griddle plate
- Zinc cast and chrome plated knobs

- Continuous and adjustable standing pilot for instant ignition
- Easy to clean grease tray
- 3" grease trough
- Adjustable and non-skid feet (60-80mm)

12"

Specifications


Model	AMBMG-12
Exterior Dim. WxDxH (mm) ..	307x769x352
Burner	1
Total Rate BTU/hr	30,000
Manifold Gas Pressure.	NG 4"W.C. 10mbar LP 10"W.C. 25mbar
Orifice Size	NG #39 LP #52

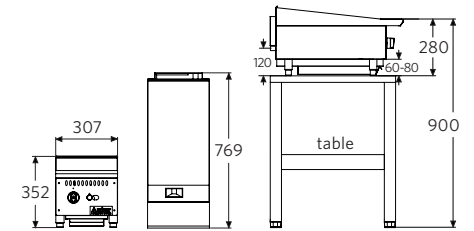

24"

Specifications


Model	AMBMG-24
Exterior Dim. WxDxH (mm) ..	610x769x352
Burner	2
Total Rate BTU/hr	60,000
Manifold Gas Pressure.	NG 4"W.C. 10mbar LP 10"W.C. 25mbar
Orifice Size	NG #39 LP #52

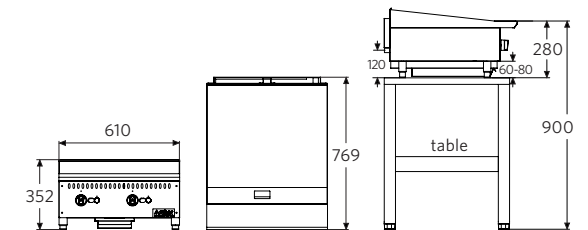

36"

Specifications


Model	AMBMG-36
Exterior Dim. WxDxH (mm) ..	910x769x352
Burner	3
Total Rate BTU/hr	90,000
Manifold Gas Pressure.	NG 4"W.C. 10mbar LP 10"W.C. 25mbar
Orifice Size	NG #39 LP #52

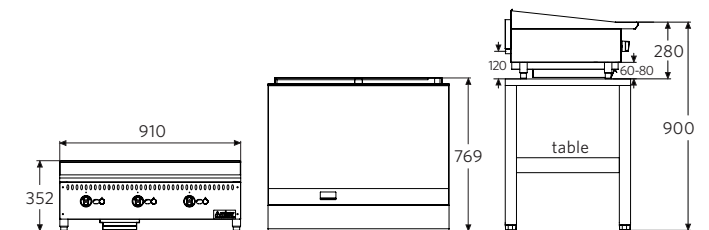

48"

Specifications

Model	AMBMG-48
Exterior Dim. WxDxH (mm) ..	1210x769x352
Burner	4
Total Rate BTU/hr	120,000
Manifold Gas Pressure.	NG 4"W.C. 10mbar LP 10"W.C. 25mbar
Orifice Size	NG #39 LP #52

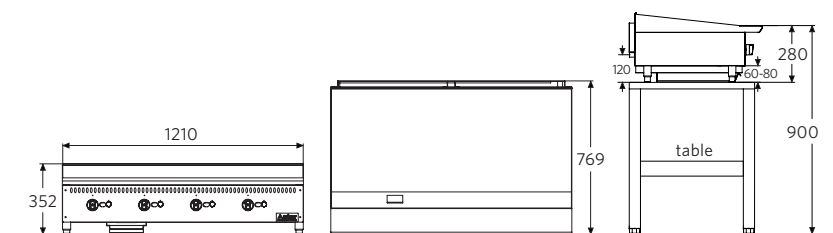

Thermostatic Chrome Griddle

24"

AMBTG-24



36"

AMBTG-36



Details


- Chrome plated stainless steel exterior
- 4" Chrome plated stainless steel landing ledge with a bull nose design and 3" fully welded splash guard
- 1" thick griddle plate
- Zinc cast knobs

- Continuous and adjustable standing pilot for instant ignition
- Easy to clean grease tray
- 3" grease trough
- Adjustable and non-skid feet (60-80mm)

24"

Specifications


Model	AMBTG-24
Exterior Dim. WxDxH (mm) ..	610x769x352
Burner	2
Total Rate BTU/hr	56,000
Manifold Gas Pressure	NG 5"W.C. 12.44mbar LP 10"W.C. 25mbar
Orifice Size	NG #39 LP #52

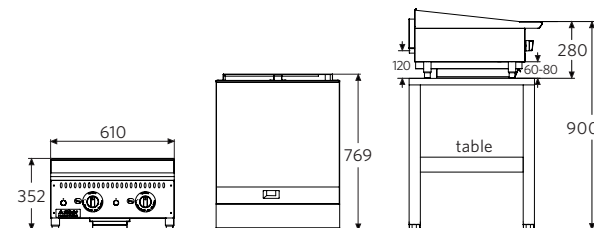

36"

Specifications

Model	AMBTG-36
Exterior Dim. WxDxH (mm) ..	910x769x352
Burner	3
Total Rate BTU/hr	84,000
Manifold Gas Pressure	NG 5"W.C. 12.44mbar LP 10"W.C. 25mbar
Orifice Size	NG #39 LP #52

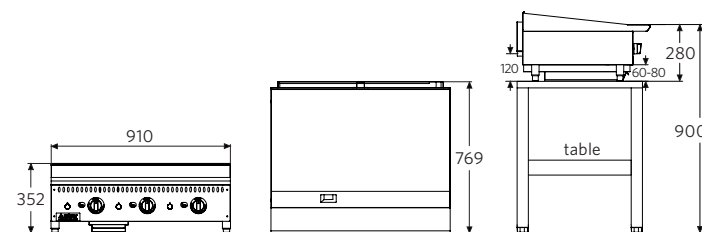

Gas Range Burner

4 Burners

AMBGR-4



Details

- Stainless steel front sides and backriser with 9" top shelf
- Stainless steel tubular burner and radiant plate to ensure consistent cooking heat
- Round cast iron and anti-clogging lift-off burners
- 12x12" removable cast iron bowl grate design
- Flush mounted top grates to front ledge
- Porcelain-enamel oven interior side guides, rear, deck and door lining for easy cleaning
- 2 nickel plated racks with 3 rack position

6 Burners

AMBGR-6




- Oven door features a spring-assisted, counterbalance system that requires no adjustment
- Zinc cast and chrome plated knobs
- Dial-type electronic thermostat that displays °C and °F
- 4" bull nose design stainless steel landing ledge
- Continuous and adjustable standing pilot on each burner for instant ignition
- Full width grease tray
- Adjustable legs (120-180mm) Optional: Caster wheels

4 Burners

Specifications


Model	AMBGR-4
Exterior Dim. WxDxH (mm)	610x800x1505
Burner	4
Burner Total Rate BTU/hr	NG 120,000 LP 108,000
Orifice Size for Burner	NG #41 LP #53
Oven Internal Cavity WxDxH (mm) ..	508x571.5x349.3
Oven Temperature Range(°C)	+93 ~ +260
Oven Total Rate BTU/hr	NG 33,000 LP 28,000
Orifice Size for Oven	NG #38 LP #53
Manifold Gas Pressure	NG 5"W.C. 12.44mbar LP 10"W.C. 25mbar

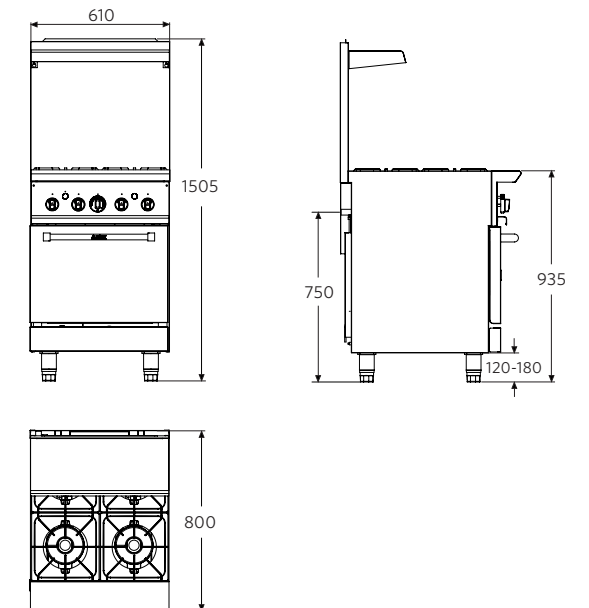

6 Burners

Specifications

Model	AMBGR-6
Exterior Dim. WxDxH (mm)	910x800x1505
Burner	6
Burner Total Rate BTU/hr	NG 180,000 LP 162,000
Orifice Size for Burner	NG #41 LP #53
Oven Internal Cavity WxDxH (mm) ..	660.4x571.5x349.3
Oven Temperature Range(°C)	+93 ~ +260
Oven Total Rate BTU/hr	NG 33,000 LP 28,000
Orifice Size for Oven	NG #38 LP #53
Manifold Gas Pressure	NG 5"W.C. 12.44mbar LP 10"W.C. 25mbar

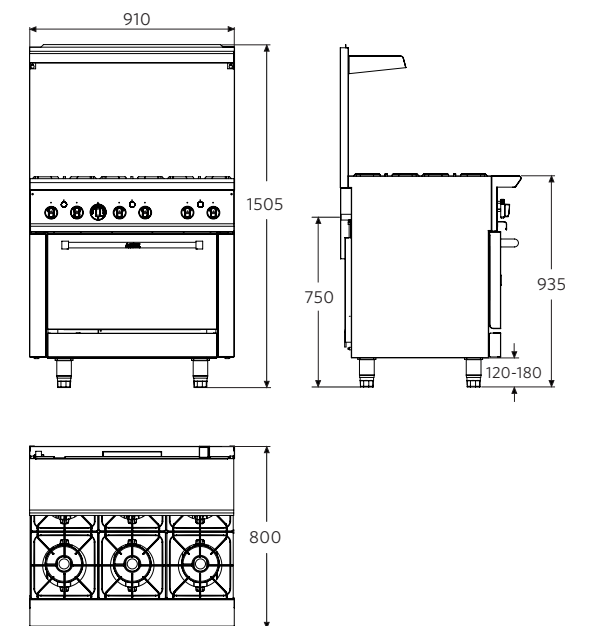

Hot Plate Burner

2 Burners

AMBHPB-2



4 Burners

AMBHPB-4



6 Burners

AMBHPB-6




Details

- Cast iron and anti-clogging round lift-off burners
- 12x12" removable cast iron bowl grate design
- 4" stainless steel landing ledge with a bull nose design
- Flush-mounted top grates to front ledge
- Zinc cast and chrome plated knobs
- Continuous and adjustable standing pilot for instant ignition
- Full width grease tray
- Adjustable and non-skid feet (60-80mm)

2 Burners

Specifications


Model	AMBHPB-2
Exterior Dim. WxDxH (mm) ..	310x738x280
Burner	2
Total Rate BTU/hr	50,000
Manifold Gas Pressure.	NG 4"W.C. 10mbar LP 10"W.C. 25mbar
Orifice Size	NG #43 LP #55

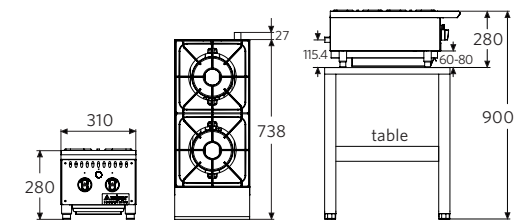

4 Burners

Specifications


Model	AMBHPB-4
Exterior Dim. WxDxH (mm) ..	610x738x280
Burner	4
Total Rate BTU/hr	100,000
Manifold Gas Pressure.	NG 4"W.C. 10mbar LP 10"W.C. 25mbar
Orifice Size	NG #43 LP #55

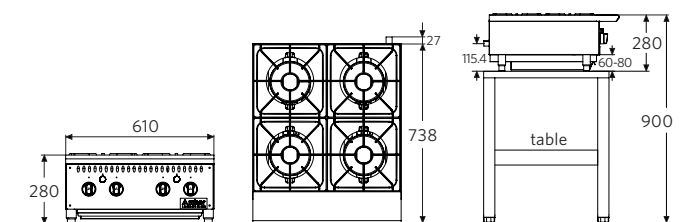

6 Burners

Specifications

Model	AMBHPB-6
Exterior Dim. WxDxH (mm) ..	915x738x280
Burner	6
Total Rate BTU/hr	150,000
Manifold Gas Pressure.	NG 4"W.C. 10mbar LP 10"W.C. 25mbar
Orifice Size	NG #43 LP #55

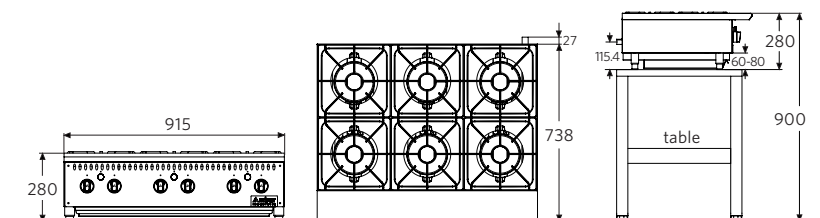

Stockpot Range 1 Burner

AMBSPR-1


Details

- 3 ring burner with 2 adjustable gas valve
- Removable heavy duty cast iron grate
- Zinc cast and chrome plated knobs
- Continuous and adjustable standing pilot for instant ignition
- Full width grease tray
- Adjustable and non-skid heavy duty feet (140-190mm)



Specifications

Model	AMBSPR-1
Exterior Dim. WxDxH (mm) ..	458x520x575
Burner	1
Total Rate BTU/hr	80,000
Manifold Gas Pressure	NG 5"W.C. 12.44mbar LP 10"W.C. 25mbar
Orifice Size	NG #32 LP #47

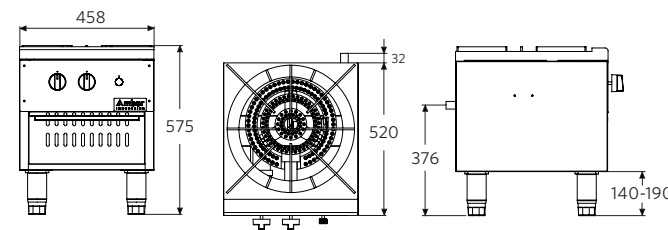

Gas Salamander

AMBG-900


Details

- Stainless steel exterior and interior
- Gas-fired infrared burners
- Removable and spring balanced rack for easy cleaning and safe rack lifting
- Zinc cast and chrome plated knob
- 3-position ball grip handle
- Continuous and adjustable standing pilot for instant ignition
- Full width grease tray
- Adjustable and non-skid feet (100-135mm)



Specifications

Model	AMBG-900
Exterior Dim. WxDxH (mm) ..	916x608x560
Burner	1
Total Rate BTU/hr	NG 35,000 LP 32,000
Manifold Gas Pressure	NG 5"W.C. 12.44mbar LP 10"W.C. 25mbar
Orifice Size	NG #32 LP #47

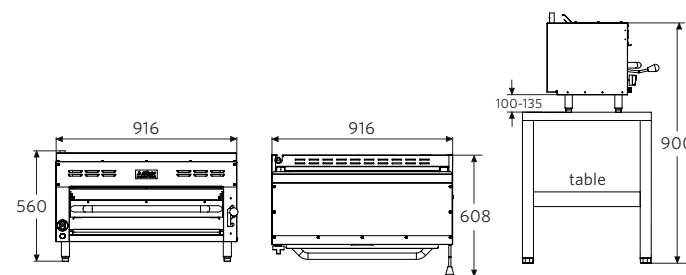

Electric Convection Oven 1 Chamber 5 Racks

AMBECO1C-5




Details

- Stainless steel exterior
- Porcelain-enamel oven interior for easy cleaning and durability
- 5 nickel-plated racks with 10 bracket levels, suitable for 26x18" oven pans
- Two independent doors with full view windows
- Downward opening control panel for easy service
- 1/2 HP, dual speed fan motor (1725/1140rpm) - 2 speed fan switch controls
- 60 minute manual timer and dial-type electronic thermostat displays °C and °F
- Switch for two halogen interior lights
- Forced "cool down" for faster cooking time and even temperature
- Four castor wheels with brakes provide the unit with hassle-free mobility

Specifications

Model	AMBECO1C-5
Exterior Dim. WxDxH (mm) ..	967x1034x1570
Rack Dimension (mm)	713x535
Temperature Range (°C)	+66-+260
Heating Power (KW)	10
Power Supply	400V / 50Hz
Current	31A / 3PH

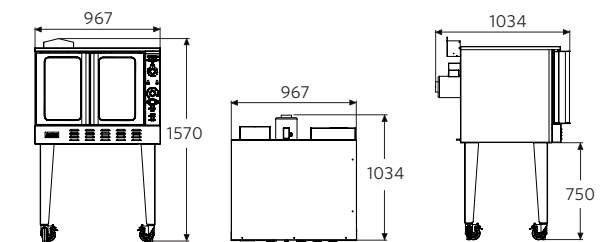

Induction Ranges



Induction Cooker


AMBIC-3500

Details

- Stainless steel body
- Ceramic glass
- LED timer display (0-180 minutes)
- Touch control
- Electric overheating protection
- 10 power levels and 10 temperature settings
- Half bridge technology
- Automatic shut off after 2 hours of inactivity

Specifications

Model	AMBIC-3500
Exterior Dim. WxDxH (mm) ..	340x432x125
Power	3500
Voltage Supply	220-240V I 1PH
Frequency (Hz).....	50/60
Temperature Range(°C)	+60~+240

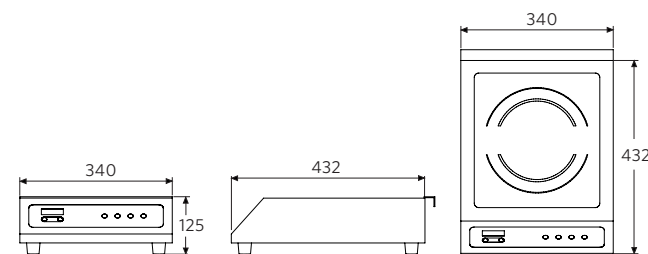

Double Hob Induction Cooker

AMBIC-7000D




Details

- Stainless steel body
- Ceramic glass
- Touch control
- Separate control for each plate
- Electric overheating protection
- 10 power levels and 10 temperature settings
- Automatic shut off after 2 hours of inactivity

Specifications

Model	AMBIC-7000D
Exterior Dim. WxDxH (mm) ..	390x690x115
Power	7000 (3500x2)
Voltage Supply	220-240V I 1PH
Frequency (Hz).....	50/60
Temperature Range(°C)	+60~+240

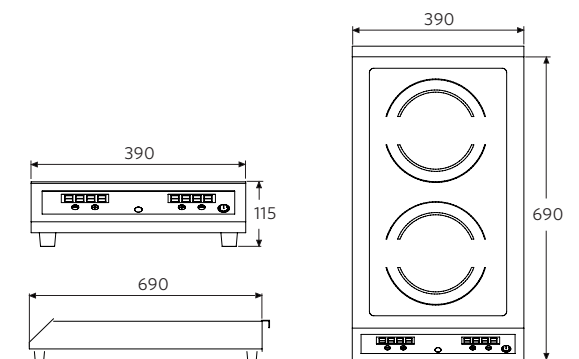

Induction Wok Cooker


AMBIWC-3500

Details

- Stainless steel body
- Ceramic glass
- LED timer display (0-180 minutes)
- Touch control / safety lock
- Electric overheating protection
- 10 power levels and 10 temperature settings
- Half bridge technology
- Automatic shut off after 2 hours of inactivity

Specifications

Model	AMBIWC-3500
Exterior Dim. WxDxH (mm) ..	340x432x125
Power	3500
Voltage Supply	220-240V I 1PH
Frequency (Hz).....	50/60
Temperature Range(°C)	+60~+240

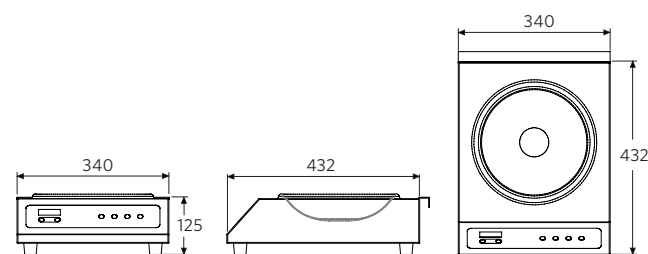

Induction Drop-In Cooker


AMBIDC-3500

Details

- Stainless steel body
- Ceramic glass
- Adjustable power by knob
- Electric overheating protection
- 10 power levels and 10 temperature settings
- Automatic shut off after 2 hours of inactivity

Specifications

Model	AMBIDC-3500
Exterior Dim. WxDxH (mm) ..	360x380x120
Power	3500
Voltage Supply	220-240V I 1PH
Frequency (Hz)	50/60
Temperature Range(°C)	+60~+240

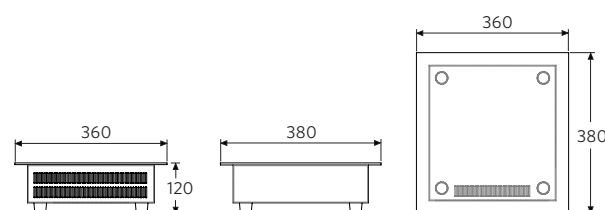

Concealed Induction Cooker

AMBCIC-1800

Details

- Stainless steel body
- Ceramic glass
- Adjustable power by knob
- LED timer display (0-120 minutes)
- Electric overheating protection
- 9 power levels and 9 temperature settings
- Automatic shut off after 2 hours of inactivity
- Fits under 15mm marble

Specifications

Model	AMBCIC-1800
Exterior Dim. WxDxH (mm) ..	360x360x125
Power	1800
Voltage Supply	220-240V I 1PH
Frequency (Hz)	50/60
Temperature Range(°C)	+60~+240

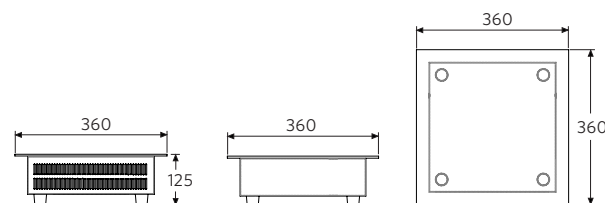


Table Top Induction Deep Fryer

Single Tank

AMBIDF-1



Details

- No heating rod (oil and electricity are separated)
- Fast and efficient heating with optimal heat distribution
- Large capacity tank with rounded inside corners for easy cleaning
- V-shaped bottom for an optimal cold zone to reduce food taste transfer and provide longer-lasting clean oil
- 15mm drain valve for rapid oil draining

Single Tank

Specifications

Model	AMBIDF-1
Exterior Dim. WxDxH (mm) ..	289x496x414
Tank	1
Oil Capacity (L)	8
Power	3500
Voltage Supply	220-240V
Frequency (Hz)	50/60
Temperature Range(°C)	+60~+190

Double Tank

AMBIDF-1




- Includes a stainless steel cover, fryer screen and a fryer basket with a plastic-coated handle
- Tempered glass and a liquid-proof control panel
- Features a 4-digit LED display with an adjustable temperature range of 60-190°C and a timer-controlled automatic shut-off
- Four non-slip feet

Double Tank

Specifications

Model	AMBIDF-1
Exterior Dim. WxDxH (mm) ..	578x496x414
Tank	2
Oil Capacity (L)	8+8
Power	3500+3500
Voltage Supply	220-240V
Frequency (Hz)	50/60
Temperature Range(°C)	+60~+190

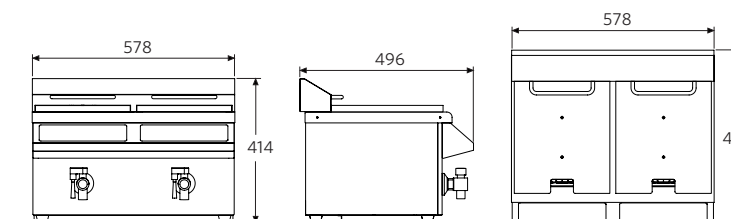

Snack Line



Salamander

AMBECS-600




Details

- Grade 430 stainless steel construction
- Dual energy regulator control
- Easy-clean crumb tray & reflector
- Ideal for grilling, top toasting, and finishing off ingredients such as cheese and toppings
- Thermostat Control

Specifications

Model	AMBECS-600
Exterior Dim. WxDxH (mm) ..	600x450x500
Power	4000
Voltage Supply	220-240V I 1PH
Frequency (Hz)	50/60
Temperature Range(°C)	+50-+300

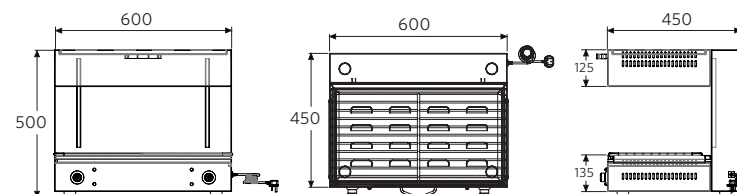

Bain Marie

AMBBM-15




Details

- Grade 430 stainless steel construction
- Fits 1/1 GN (GN pan and cover included)
- Adjustable temperature
- Wet heat only operation
- Insulated drain cook

Specifications

Model	AMBBM-15
Exterior Dim. WxDxH (mm) ..	370x610x250
Pan Depth (mm)	150
Power	1200
Voltage Supply	220-240V I 1PH
Frequency (Hz)	50/60
Temperature Range(°C)	+0-+90

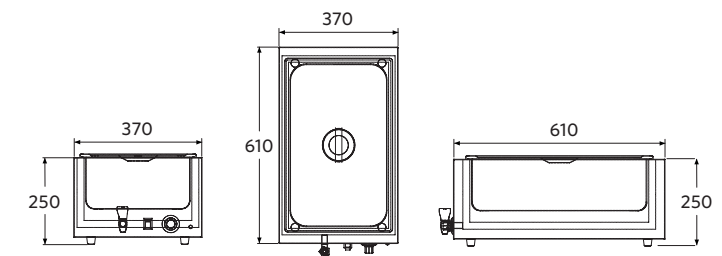

Fry Dump Warmer

AMBFW-600




Details

- Grade 430 stainless steel construction
- High-efficient, energy saving
- Heat and light display
- Base includes food pan
- Easy-to-use light and heat switches on the front of the unit

Specifications

Model	AMBFW-600
Exterior Dim. WxDxH (mm) ..	340x570x430
Pan Depth	90
Capacity	1 x 1/1 GN
Power	600
Frequency (Hz)	50/60
Temperature Range(°C)	+80

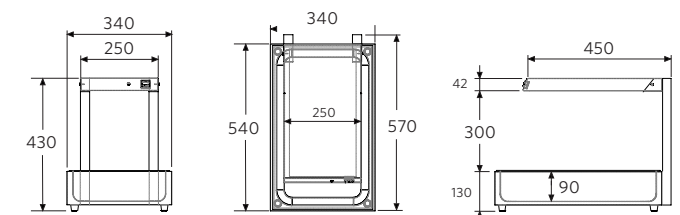

Industrial Taps




Glass Rinser with Base

AMBGR-B

Details

- Made of high quality material, sturdy and it is durable enough for long time use. High pressure washing, saves time, water and energy, very practical and convenient
- No Power Required: Simply press the rim of your pitcher or cup against the star-shaped base to engage the nozzle

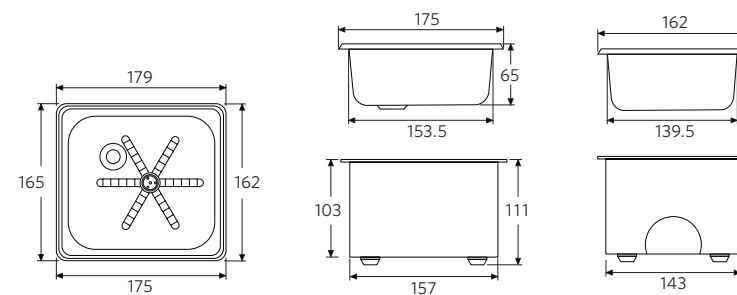

Specifications


Model AMBGR-B
Exterior Dim. WxDxH (mm) .. 179x165x111

Mid Spray Glass Rinser

AMBGR-1

Details

- Made of high-quality stainless steel, sturdy and durable enough for long-time use
- No Power Required: Simply press the rim of your glass or cup against the star-shaped base to engage the nozzle
- Use general tap water pressure to rinse, cup mouth is down, and cup bottom is gently pressed to automatically spray water
- Suitable for many types and sizes of glass / cup

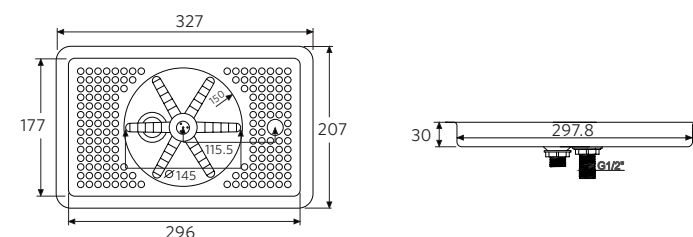

Specifications

Model AMBGR-1
Exterior Dim. WxDxH (mm) .. 327x207x30

Dual Spray Glass Rinser

AMBGR-2




Details

- Made of high-quality stainless steel, sturdy and durable enough for long-time use
- No Power Required: Simply press the rim of your glass or cup against the star-shaped base to engage the nozzle
- Use general tap water pressure to rinse, cup mouth is down, and cup bottom is gently pressed to automatically spray water
- Suitable for many types and sizes of glass / cup

Specifications

Model AMBGR-2
Exterior Dim. WxDxH (mm) 645x217x24

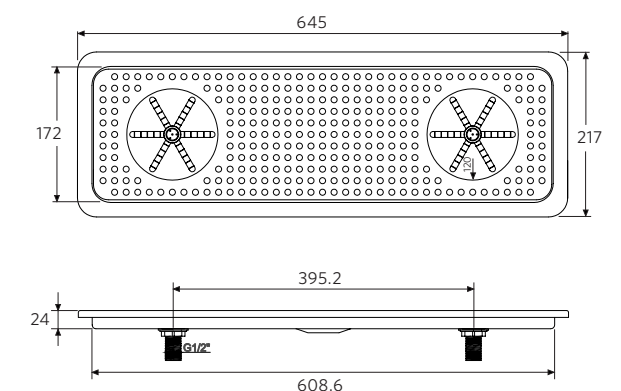

Single Base Sensor Faucet


AMBF-42D

Details

- 4" (102mm) deck mounted base
- Hands-free sensor faucet: the water supply can be opened and closed automatically by the sensor.

Specifications

Model AMBF-42D
Mount deck
Hole single
Battery 4 x AA batteries

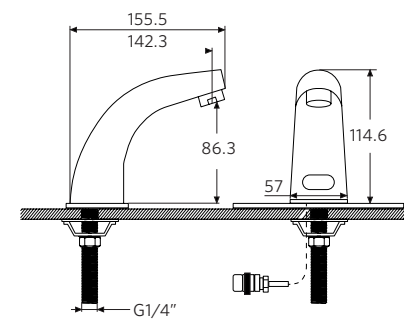

Double-Base Faucet With Swing Spout


AMBF-312

Details

- 8" (203mm) centres & 12" (305mm) swing nozzle
- 1/2" NPT eccentric flanged female inlets
- Swivel spout rotates 360 degrees which allows for greater access to all areas of the sink
- Strong construction for heavy-duty use

Specifications

Model AMBF-312
Mount deck
Hole single

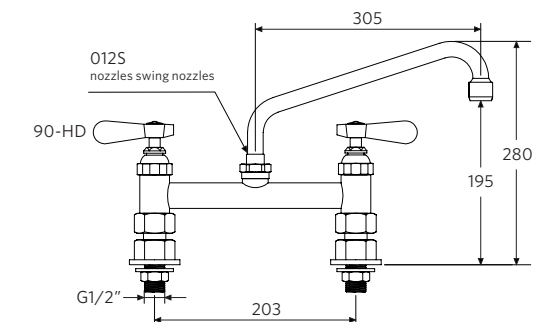

Deck Mounted Pre-rinse Faucet


AMBF-072

Details

- 8" (203mm) center deck mounted type
- 20" (510mm) riser brass pipe
- 44" (1118mm) flexible stainless-steel hose and santoprene inner pipe
- 6" (152mm) wall bracket
- Swing nozzle with 12" (305mm) length
- The product includes check valve to prevent crossflow
- The spray valve conforms to ANSI/ASTM F2324-03

Specifications

Model AMBF-072
Mount deck/wall
Hole double

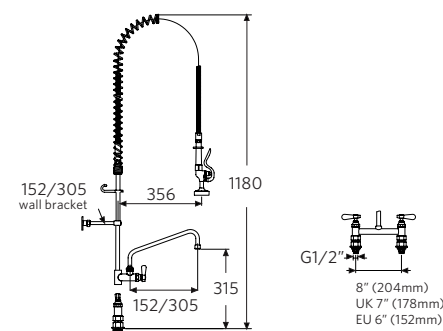

Wall Mounted Faucet With Swing Spout


AMBF-412

Details

- 8" (203mm) center & 12" (305mm) swing nozzle
- 1/2" NPT eccentric flanged female inlets
- Stainless steel and brass construction
- Swivel spout access to all areas of the sink
- This heavy-duty bar faucet handles boast both "hot" and "cold" color-coded labels for easy identification

Specifications

Model AMBF-412
Mount wall
Hole single

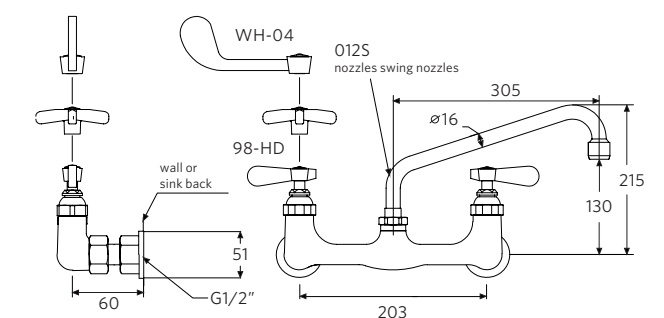

Hand Wash Basin Faucet- Long Spout


AMBF-154

Details

- Single handle
- The tap can be rotated 180 degrees
- The mixer tap combines hot and cold water

Specifications

Model AMBF-154
Mount deck
Hole single

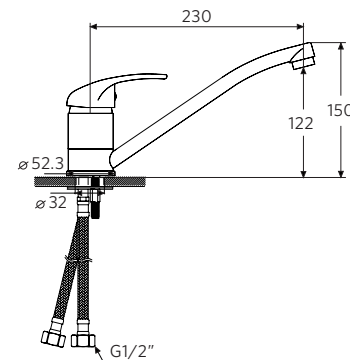

Single Base Faucet With Swing Spout (Europe kitchen faucet)


AMBF-138

Details

- Double lever single base faucet
- Swing nozzle with 300mm length
- Easy to Install: Installation instruction is included in the package

Specifications

Model AMBF-138
Mount deck
Hole single

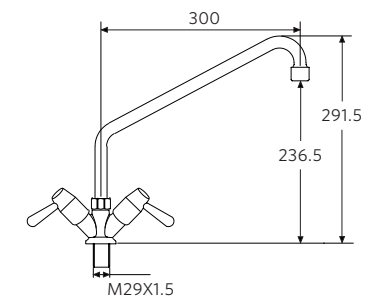

Hand Wash Basin Faucet- Short Spout


AMBF-158

Details

- Single handle
- The tap can be rotated 180 degrees
- The mixer tap combines hot and cold water

Specifications

Model AMBF-158
Mount deck
Hole single

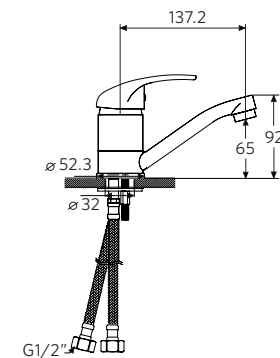

Overflow Pipe


AMBOP-320

Details

- 2" NPT male outlet / 1 1/2" NPT female outlet
- 2" NPT female x 1 1/2" NPT male adapter
- 3 1/2" snap-in strainer
- Long twist handle w/ heat resistant plastic grip
- Rough chrome plated brass body & adapter
- Stainless steel handle & flat strainer
- Overflow outlet w/ cap & sealing washer

Specifications

Model AMBOP-320
Mount deck
Hole single

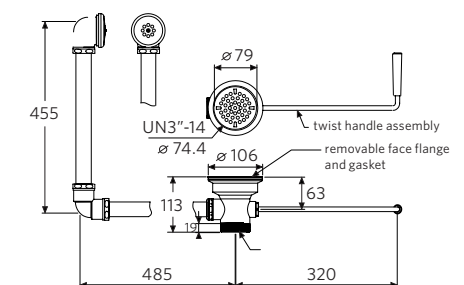


Hose Reel

AMBHR-15

Details

- 15m heavy-duty, non-toxic, blue nitrile hose with knitted reinforcement 7/8"-20UNEF female I.D., rated to 300PSI, burst pressure 1000PSI, working temperature: 0-100°C.
- Open hose reel with epoxy color coated steel finish
- 3/8" NPT female inlet
- Equipped with front trigger water gun
- Ratcheting system holds the length of hose until a slight tug, retracts automatically
- Adjustable hose bumper
- Multi-fit bracket for wall, ceiling or under counter mounting
- Suitable for commercial kitchens, restaurants, coffee shops and hotels

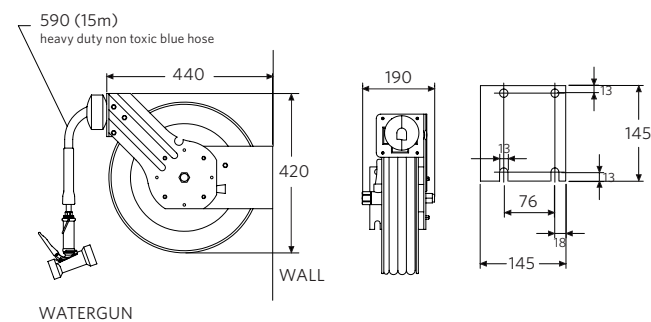

Specifications

Model..... AMBHR-15
Mount..... wall/ceiling/undecounter
Hole..... single

Dipper Well with Faucet

AMBDF-840

Details

Faucet:


- Polished chromed plated brass body with spout
- Polished chrome plated knob
- 1/2" NPSM male inlet with 5/16" I.D sweat fitting connection

Bowl:

- 4" (102mm) length of 1-1/2" (38mm) brass tubing
- Stainless steel internal outer container & tail washer
- Sits flush with tabletop
- Drains quickly & easily

Drop in Requirements:

- 5-3/4" (146mm) for stainless steel bowl
- 1-3/8" (35mm) above table
- 1/16 (1.6mm) solder inlet

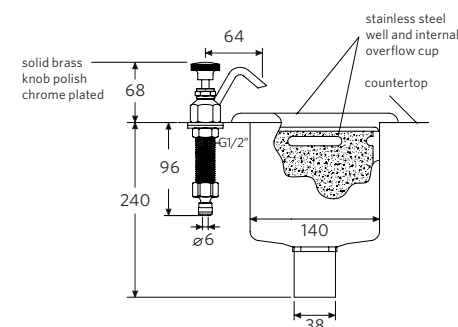

Specifications

Model AMBHR-15
Mount deck
Hole single



Sinks



Knee Operated Handwash Sink


AMBER-HWS40KO

Details

- Grade 304 stainless steel
- Knee push operation
- Backsplash included
- Swan neck faucet included
- Time-controlled faucet with 3-5 seconds time flow
- Bottle trap included
- Hygienic, easy clean design
- Curved sink towards the drain, ensuring perfect water drainage

Specifications

Model	AMBHWS-278
Exterior Dim. WxDxH (mm) ..	400x340x560
Installation Type	Wall Mounted
Material	Stainless Steel
Weight (Kg).....	5

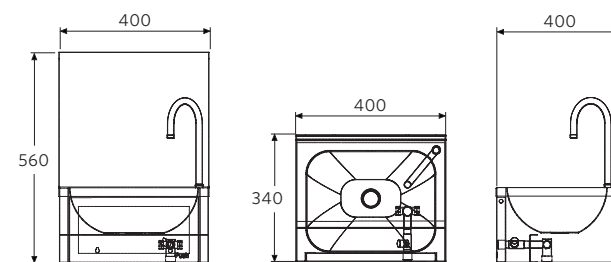

Insertion Handwash Round Sink


AMBHWS-278

Details

- Grade 304 stainless steel
- Under mount
- Heavy duty for commercial use
- Sturdy construction
- Bottle trap excluded
- Hygienic, easy clean design
- Curved sink towards the drain, ensuring perfect water drainage

Specifications

Model	AMBHWS-278
Diameter (mm)	278
Depth (mm)	110
Mount	under mount

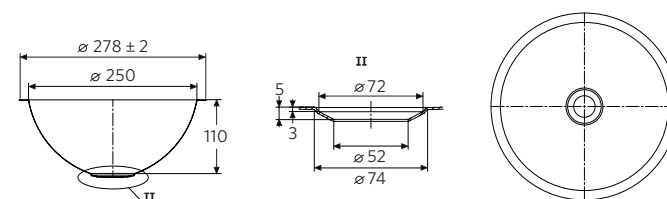

Stainless Steel Mop Sink

AMBMS-50




Details

- Grade 304 stainless steel
- Combined bucket sink and hand wash unit
- Adjustable tube legs
- Removable bucket grating

- Heavy duty for commercial use
- Sturdy construction
- Bottle trap not included
- Hygienic, easy clean design

Specifications

Model	AMBMS-50
Exterior Dim. WxDxH (mm) ..	500x700x950
Bucket Sink Dim. WxD (mm) ..	400x400

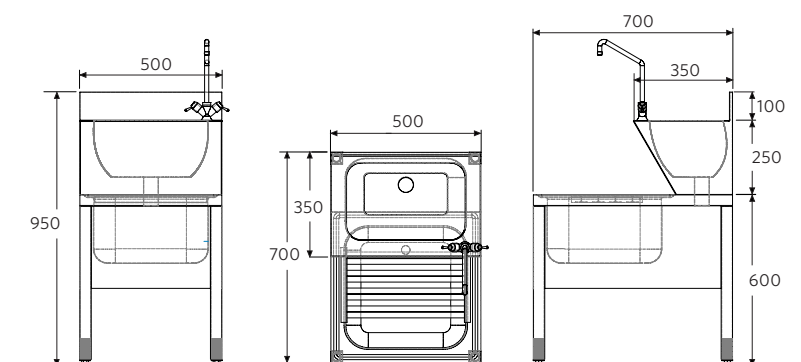

Perin Sinks




Details

- Robust Construction
- Heavy duty for commercial use
- Radius internal corners for easy cleaning
- Integrated backsplash

Large Bowl Sink

Specifications


Model	127111535++
Dimension WxD (mm)	1200x700
Bowl Dimension WxDxH (mm)	1100x500x350



Single Bowl Sink

Specifications

Model	07155++
Dimension WxD (mm)	700x700
Bowl Dimension WxDxH (mm)	500x500x300




Perin Sinks

Double Bowl Sink

Specifications


Model	127255++
Dimension WxD (mm)	1200x700
Bowl Dimension WxDxH (mm)	500x500x350



Double Bowl Sink

Specifications


Model	147265++
Dimension WxD (mm)	1400x700
Bowl Dimension WxDxH (mm)	600x500x300



Single Bowl Sink on Right Drain

Specifications


Model	147155++DX
Dimension WxD (mm)	1400x700
Bowl Dimension WxDxH (mm)	500x500x300



Single Bowl Sink on Left Drain

Specifications


Model	147165++SX
Dimension WxD (mm)	1400x700
Bowl Dimension WxDxH (mm)	500x500x300



Double Bowl Sink on Right Drain

Specifications


Model	167255++DX
Dimension WxD (mm)	1600x700
Bowl Dimension WxDxH (mm)	500x500x300

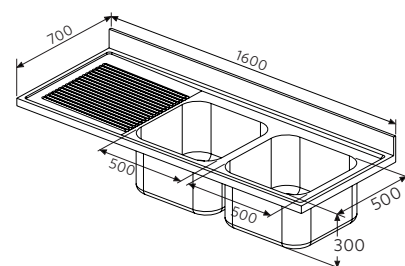

Double Bowl Sink on Right Drain

Specifications


Model	127255++
Dimension WxD (mm)	1600x700
Bowl Dimension WxDxH (mm)	500x500x300

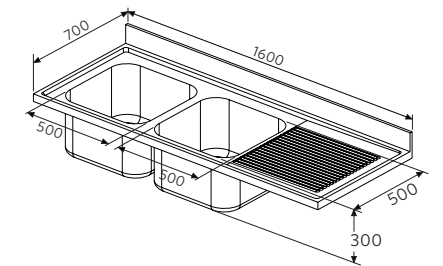

Double Bowl Sink on Double Drain

Specifications


Model	226255++2G
Dimension WxD (mm)	2200x600
Bowl Dimension WxDxH (mm)	500x500x300

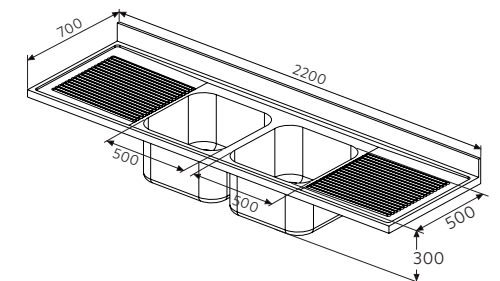

Three Bowl Sink

Specifications


Model	18070
Dimension WxD (mm)	1800x700
Bowl Dimension WxDxH (mm)	500x500x300

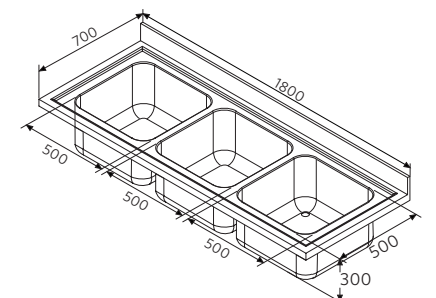

Vegetable Preparation Table

Specifications


Model	CV12711032++
Dimension WxD (mm)	1200x700
Bowl Dimension WxDxH (mm)	1000x300x200

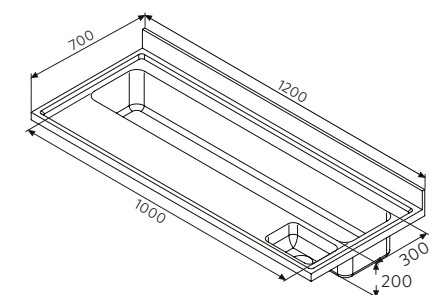

Vegetable Preparation Table

Specifications

Model	CV14711232++
Dimension WxD (mm)	1400x700
Bowl Dimension WxDxH (mm)	1200x300x200

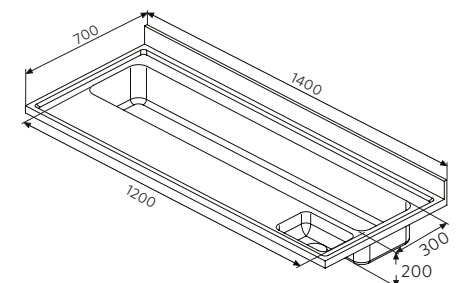

Pressed Bowl




Details


- Heavy duty for commercial use
- Radius internal corners for easy cleaning
- Seamless and lightweight structure
- Pressed from a single sheet, leaving no visible welds or joints, which enhances durability and hygiene

Specifications


Model SE 404030N1
Bowl Dimension WxDxH (mm) 400x400x300
Hole Diameter (mm) 1 & 1/2"




Model 333320
Bowl Dimension WxDxH (mm) 330x330x200
Hole Diameter (mm) 1 & 1/2"




Model 5040300
Bowl Dimension WxDxH (mm) 500x400x300
Hole Diameter (mm) 1 & 1/2"




Model 505030
Bowl Dimension WxDxH (mm) 500x500x300
Hole Diameter (mm) 1 & 1/2"




Model 605030
Bowl Dimension WxDxH (mm) 600x500x300
Hole Diameter (mm) 1 & 1/2"




Model 252520
Bowl Dimension WxDxH (mm) 250x250x200
Hole Diameter (mm) 1 & 1/2"




Model 404025
Bowl Dimension WxDxH (mm) 400x400x250
Hole Diameter (mm) 1 & 1/2"



Model 505025
Bowl Dimension WxDxH (mm) 500x500x250
Hole Diameter (mm) 1 & 1/2"



Model V2618
Bowl Dimension WxDxH (mm) 260x180
Hole Diameter (mm) 1 & 1/2"



Decorative Lamp & Strip Heaters

Kitchen Hood Light




Details


- Adequate lighting for safe and efficient cooking
- Can withstand high temperatures and humidity levels
- Replaceable lamp tube
- Oil proof
- Waterproof

Specifications

Model	AMBKHL-70
Exterior Dim. WxDxH (mm)	700x200x65
Power (W)	16



Model	AMBKHL-100
Exterior Dim. WxDxH (mm)	1000x200x65
Power (W)	24



Model	AMBKHL-130
Exterior Dim. WxDxH (mm)	1300x200x65
Power (W)	40



Heatlamp

Round Cone

AMBHL-27 RC

AMBHL-27 RC AB

AMBHL-27 RC GW



Round Dome

AMBHL-25 RD



Flared

AMBHL-19 FL GD



Bell-shaped

AMBHL-15 BS CP



Cylindrical

AMBHL-15 CY RG



Details

- Hanging food warmer light
- Adjustable height from 370-1700mm
- Equipped with durable on/off switch
- 250 watts food heat lamp bulb
- Easy to assemble, light weight and portable
- Retractable cord mount

Round Cone

Specifications

Model	AMBHL-27 RC, AMBHL-27 RC AB, AMBHL-27 RC GW
Lamp Diameter(mm)	270
Power (W)	250
Voltage Supply	220V
Frequency (Hz)	50/60Hz
Heating Source	Infrared

Round Dome

Specifications

Model	AMBHL-25 RD
Lamp Diameter(mm)	250
Power (W)	250
Voltage Supply	220V
Frequency (Hz)	50/60Hz
Heating Source	Infrared

Flared

Specifications

Model	AMBHL-19 FL GD
Lamp Diameter(mm)	190
Power (W)	250
Voltage Supply	220V
Frequency (Hz)	50/60Hz
Heating Source	Infrared

Bell-shaped






Specifications

Model	AMBHL-15 BS CP
Lamp Diameter(mm)	150
Power (W)	250
Voltage Supply	220V
Frequency (Hz)	50/60Hz
Heating Source	Infrared

Cylindrical

Specifications

Model	AMBHL-15 CY RG
Lamp Diameter(mm)	150
Power (W)	250
Voltage Supply	220V
Frequency (Hz)	50/60Hz
Heating Source	Infrared



Trolley



Serving Trolley

Serving Trolley 2 Layers

AMBST-2S



Serving Trolley 3 Layers

AMBST-3S




Details

- 4 sturdy wheels (2 equipped with brakes and 2 swivel casters)
- Stain and mirror polished
- The raised edges on 4 sides help prevent items from falling
- The smooth and cavity-free raised edges makes this model easy to clean, and prevent dirt from accumulating in the corners.

Serving Trolley 2 Layers

Specifications


Model AMBST-2S
Dimension: WxDxH (mm) 950x500x925
Material 201 stainless steel

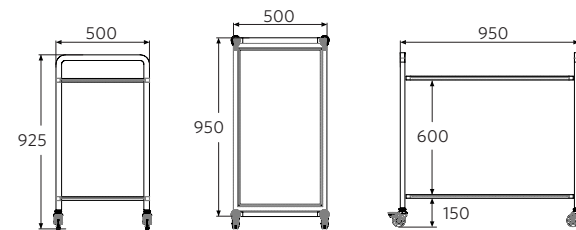

Serving Trolley 3 Layers

Specifications

Model AMBST-3S
Dimension: WxDxH (mm) 950x500x925
Material 201 stainless steel

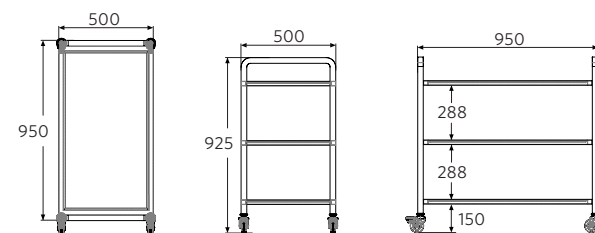

GN Trolley-15 Tiers

GN Trolley 60x40

AMBGT-47



GN Trolley 1/1

AMBGT-39



GN Trolley 2/1

AMBGT-59




Details

- High shelf trolley
- 80mm gap between shelves
- Lengthwise insertion
- Flat packed and easy to assemble
- 4 swivel wheels, 2 equipped with brakes
- Durable stainless-steel construction
- 15 GN slots offer plenty of storage space (GN pan not included)
- Movable even when completely loaded
- 4 bumpers for safety and to protect cargo in transit

GN Trolley 60x40

Specifications


Model AMBGT-47
Dimension: WxDxH (mm) 470x640x1700
GN Capacity 15 x 60x40 GN pans

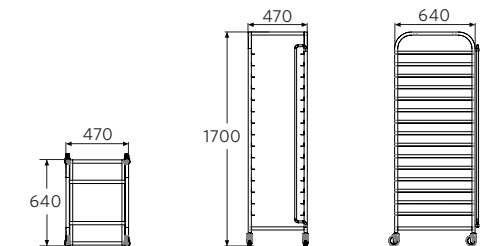

GN Trolley 1/1

Specifications


Model AMBGT-39
Dimension: WxDxH (mm) 390x570x1700
GN Capacity 15 x 1/1 GN pans

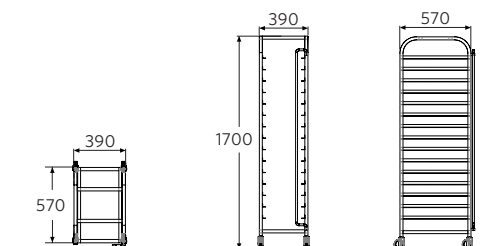

GN Trolley 2/1

Specifications

Model AMBGT-59
Dimension: WxDxH (mm) 590x690x1700
GN Capacity 15 x 2/1 GN pans

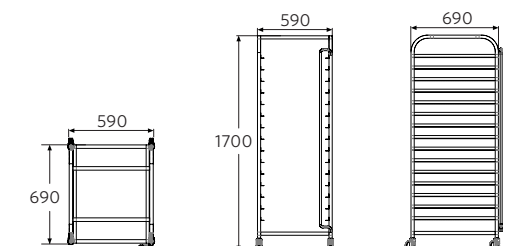

European GN Tray



Details


- Anti-jamming design
- Stackable
- 201 and/or 304 stainless steel
- Easy storage and take out
- Refined surface finish



European GN
Tray


1/9 GN Pan

Model	Specifications	Size (WxDxH)	Thickness	Pc/ctn
AMB-GN 1/9 65	1/9*65	175x107x65	0.6mm	48
AMB-GN 1/9 100	1/9*100	175x107x100	0.6mm	48
AMB-GN 1/9 150	1/ 9*150	175x107x150	0.7mm	48
AMB-GN 1/9 LID	1/9	175x107	0.7mm	48




1/6 GN Pan

Model	Specifications	Size (WxDxH)	Thickness	Pc/ctn
AMB-GN 1/6 65	1/6*65	175x160x65	0.6mm	36
AMB-GN 1/6 100	1/6*100	175x160x100	0.6mm	36
AMB-GN 1/6 150	1/6*150	175x160x150	0.7mm	36
AMB-GN 1/6 200	1/6*200	175x160x200	0.7mm	36
AMB-GN 1/6 LID	1/6	175x160	0.7mm	36




1/4 GN Pan

Model	Specifications	Size (WxDxH)	Thickness	Pc/ctn
AMB-GN 1/4 20	1/4*20	265x160x20	0.6mm	24
AMB-GN 1/4 40	1/4*40	265x160x40	0.6mm	24
AMB-GN 1/4 65	1/4*65	265x160x65	0.6mm	24
AMB-GN 1/4 100	1/4*100	265x160x100	0.6mm	24
AMB-GN 1/4 150	1/4*150	265x160x150	0.7mm	24
AMB-GN 1/4 200	1/4*200	265x160x200	0.7mm	24
AMB-GN 1/4 LID	1/4	265x160	0.7mm	24




1/3 GN Pan

Model	Specifications	Size (WxDxH)	Thickness	Pc/ctn
AMB-GN 1/3 20	1/3*20	325x175x20	0.6mm	18
AMB-GN 1/3 40	1/3*40	325x175x40	0.6mm	18
AMB-GN 1/3 65	1/3*65	325x175x65	0.6mm	18
AMB-GN 1/3 100	1/3*100	325x175x100	0.6mm	18
AMB-GN 1/3 150	1/3*150	325x175x150	0.7mm	18
AMB-GN 1/3 200	1/3*200	325x175x200	0.7mm	18
AMB-GN 1/3 LID	1/3	325x175	0.7mm	18




1/2 GN Pan

Model	Specifications	Size (WxDxH)	Thickness	Pc/ctn
AMB-GN 1/2 20	1/2*20	325x265x20	0.6mm	12
AMB-GN 1/2 40	1/2*40	325x265x40	0.6mm	12
AMB-GN 1/2 65	1/2*65	325x265x65	0.6mm	12
AMB-GN 1/2 100	1/2*100	325x265x100	0.6mm	12
AMB-GN 1/2 150	1/2*150	325x265x150	0.7mm	12
AMB-GN 1/2 200	1/2*200	325x265x200	0.7mm	12
AMB-GN 1/2 LID	1/2	325x265	0.7mm	12




1/1 GN Pan

Model	Specifications	Size (WxDxH)	Thickness	Pc/ctn
AMB-GN 1/1 20	1/1*20	530x325x20	0.6mm	6
AMB-GN 1/1 40	1/1*40	530x325x40	0.6mm	6
AMB-GN 1/1 65	1/1*65	530x325x65	0.6mm	6
AMB-GN 1/1 100	1/1*100	530x325x100	0.6mm	6
AMB-GN 1/1 150	1/1*150	530x325x150	0.7mm	6
AMB-GN 1/1 200	1/1*200	530x325x200	0.7mm	6
AMB-GN 1/1 LID	1/1	530x325	0.7mm	6




2/3 GN Pan

Model	Specifications	Size (WxDxH)	Thickness	Pc/ctn
AMB-GN 2/3 20	2/3*20	354x325x20	0.6mm	12
AMB-GN 2/3 40	2/3*40	354x325x40	0.6mm	12
AMB-GN 2/3 65	2/3*65	354x325x65	0.6mm	12
AMB-GN 2/3 100	2/3*100	354x325x100	0.6mm	12
AMB-GN 2/3 150	2/3*150	354x325x150	0.7mm	12
AMB-GN 2/3 200	2/3*200	354x325x200	0.7mm	12
AMB-GN 2/3 LID	2/3	354*325	0.7mm	12



2/1 GN Pan

Model	Specifications	Size (WxDxH)	Thickness	Pc/ctn
AMB-GN 2/1 20	2/1*20	650x530x20	0.8mm	6
AMB-GN 2/1 40	2/1*40	650x530x40	0.8mm	6
AMB-GN 2/1 65	2/1*65	650x530x65	0.8mm	6
AMB-GN 2/1 100	2/1*100	650x530x100	0.8mm	6
AMB-GN 2/1 150	2/1*150	650x530x150	0.8mm	6
AMB-GN 2/1 200	2/1*200	650x530x200	0.8mm	6
AMB-GN 2/1 LID	2/1	650x530	0.8mm	6



Accessories



Adjusted Feet / Leg Bush

Adjusted Feet

AMBAF-150



AMBAF-188




AMBAF-143



Leg Bush


AMBLB-38




Adjusted Feet

Specifications


Model	AMBAF-150
Material	Zinc Alloy
Surface Processing	Sanding
Range of Application	Fixed kitchen equipment for vessel and vehicle
Capacity Load	900kg
Adjusting Range	40-69.5mm



Model	AMBAF-188
Material	43Ø high-grade removable footed glasses




Model	AMBAF-143
Material	Stainless Steel
Surface Processing	Lights sanding
Range of Application	Goods shelves, work bench sinks, rice selling table, burner
Capacity Load	900kg
Adjusting Range	40-60mm



Leg Bush

Specifications

Model	AMBLB-38
Material	High quality PP
Surface Processing	Dark Gray
Range of Application	Goods shelves, workbench, sinks, burner
Capacity Load	300kg
Adjusting Range	45-65mm



Caster Wheels

3"

AMBWB-3



AMBWOB-3



4"

AMBWB-4



AMBWOB-4



5"

AMBWB-5




AMBWOB-5



3"

Specifications


Model	AMBWB-3, AMBWOB-3
Wheel Materials	Polypropylene/Grey Rubber/Cast Iron
Capacity Load	220 lbs (100kg)
Type of Fitting Top Plate ..	Double Ball Bearing

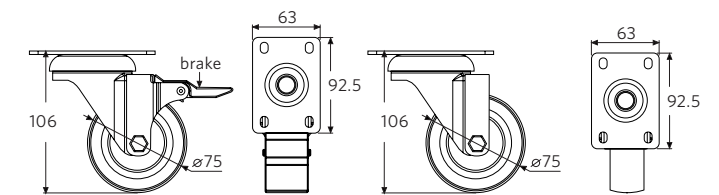

4"

Specifications


Model	AMBWB-4, AMBWOB-4
Wheel Materials	Polypropylene/Grey Rubber/Cast Iron
Capacity Load	220 lbs (100kg)
Type of Fitting Top Plate ..	Double Ball Bearing

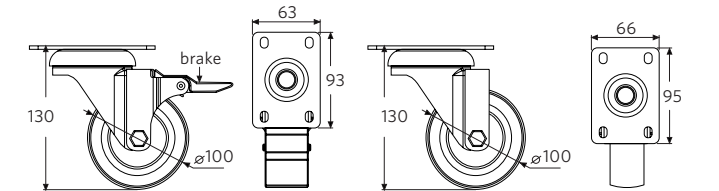

5"

Specifications

Model	AMBWB-5, AMBWOB-5
Wheel Materials	Polypropylene/Grey Rubber/Cast Iron
Capacity Load	220 lbs (100kg)
Type of Fitting Top Plate ..	Double Ball Bearing

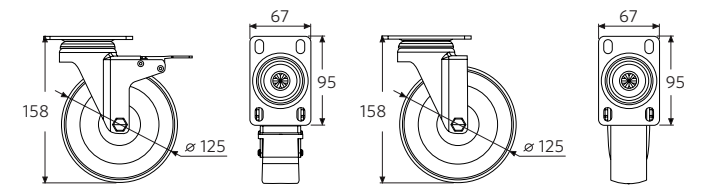

SS Grease Filter (Baffle filter)

AMBGBF-5050

Details

- Heavy-duty stainless steel material
- Efficient in grease removal
- With positive flame barrier protection
- "V" baffles continuously separate grease and air
- Grease can continuously flow off polished vanes into collection troughs
- The vane design prevents grease from dripping into cooking surfaces
- With drop handles
- Durable and economical
- Dishwasher-safe and easy to clean



Specifications

Model	AMBGBF-5050
H X W inches & mm	20 x 20 (508mm x 508mm)
KG	4.65

Oil Filter with Ears (Baffle Filter)

AMBBF-5050

Details

- Heavy-duty stainless steel material
- Trap grease and oil particles from cooking fumes before the air is exhausted
- Features handles or side extensions used for easy installation and removal




Specifications

Material	201,304' stainless steel	
Surface Processing	Drawing	
Range of application	Kitchen smoke exhaust hood for hotels and canteens	
Dimension (mm).....	500x500x40	500x500x38
	500x600x40	500x500x45
	500x700x40	500x500x50


Magnet

AMBMAg-32

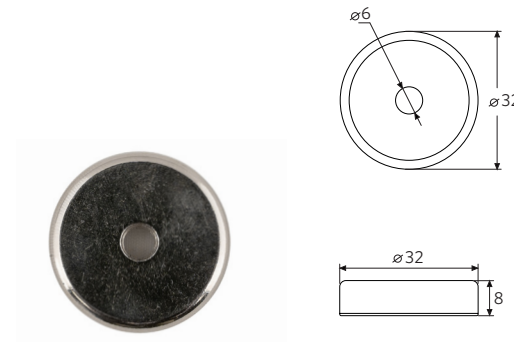

Hinges

AMBHIN-1

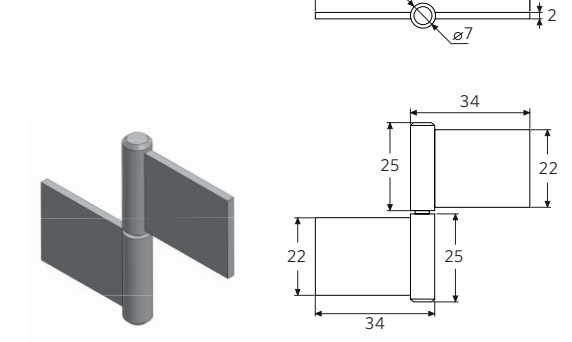

Handle

AMBHAN-1




Flange

AMBFL-76



Louvers

AMBLVR-1

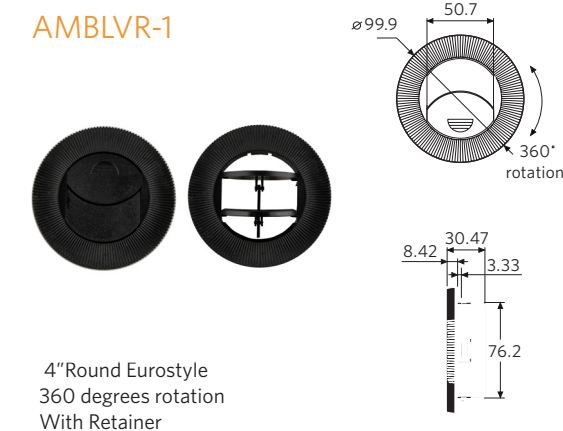

Wall Bracket Pole

AMBWBP-600



Angle


AMBAGL-350



Floor Grating Side Drain


30x30cm

AMBFG-3030 SD




60x30cm

AMBFG-6030 SD

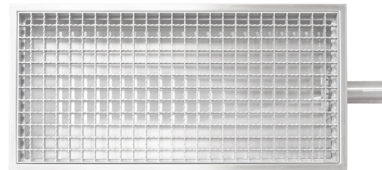

100x30cm

AMBFG-10030 SD

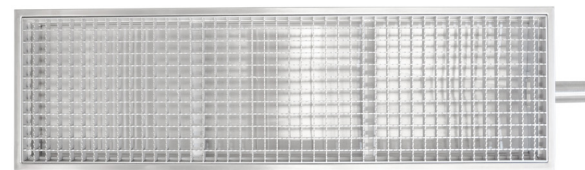




Details

- 304# stainless steel wedge wire drain
- Corrosion resistant
- Hygiene joints to prevent bacterial contamination
- Slip-resistant grate
- Outlet 50mm fitting, removable perforated strainer for quick and efficient cleaning

30x30cm

Specifications




Model AMBFG-3030 SD
 Exterior Dim. WxDxH (mm) . . 300x300x90
 Cross Bar Thickness (mm) . . 12x2
 Bear Bar Thickness (mm) . . 25x2



60x30cm

Specifications




Model AMBFG-6030 SD
 Exterior Dim. WxDxH (mm) . . 600x300x90
 Cross Bar Thickness (mm) . . 12x2
 Bear Bar Thickness (mm) . . 25x2



100x30cm

Specifications


Model AMBFG-10030 SD
 Exterior Dim. WxDxH (mm) . . 1000x300x90
 Cross Bar Thickness (mm) . . 12x2
 Bear Bar Thickness (mm) . . 25x2

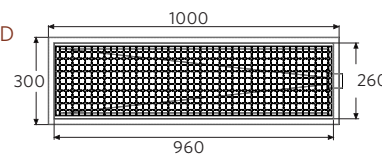

Floor Grating Bottom Drain

30x30cm

AMBFG-3030




60x30cm

AMBFG-6030



100x30cm

AMBFG-10030

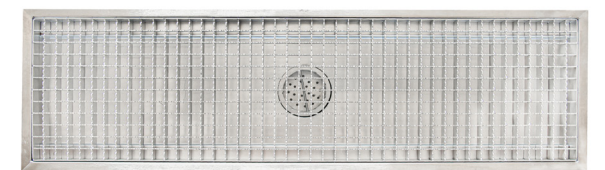




Details

- 304# stainless steel wedge wire drain
- Corrosion resistant
- Hygiene joints to prevent bacterial contamination
- Slip-resistant grate
- Outlet 100mm fitting, removable perforated strainer for quick and efficient cleaning

30x30cm

Specifications




Model AMBFG-3030
 Exterior Dim. WxDxH (mm) . . 300x300x100
 Cross Bar Thickness (mm) . . 10x3
 Bear Bar Thickness (mm) . . 20x3



60x30cm

Specifications




Model AMBFG-6030
 Exterior Dim. WxDxH (mm) . . 600x300x100
 Cross Bar Thickness (mm) . . 10x3
 Bear Bar Thickness (mm) . . 20x3



100x30cm

Specifications

Model AMBFG-10030
 Exterior Dim. WxDxH (mm) . . 1000x300x100
 Cross Bar Thickness (mm) . . 10x3
 Bear Bar Thickness (mm) . . 20x3

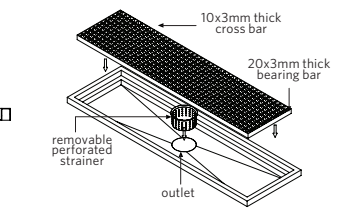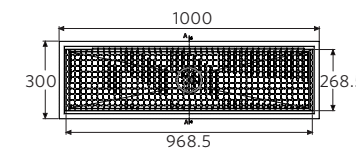

Knock out Drawer


AMBKD-25

Details

- Grade 304 stainless steel material
- Made of high-quality stainless-steel material
- Mechanically fixed non-slip feet
- Detachable drawer type box, easy to pull out
- Stain and mirror polished
- Equipped with silicone main rod, impact resistant

Specifications

Model AMBKD-25
Exterior Dim. WxDxH (mm) . . 250X350X95

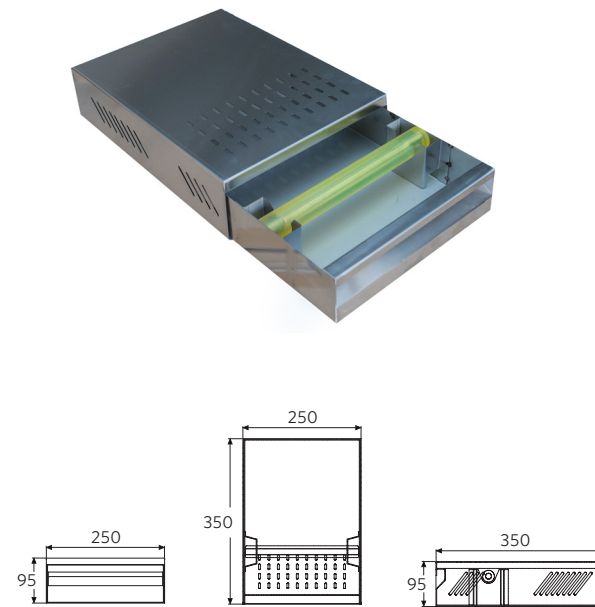

Fulterer Rail Set

35cm

FR 790 0350-L121

45cm

FR 790 0450 L121

55cm

FR 790 0550 L121





Details

- Cabinet and drawer profile with screw holes
- High lateral stability through specially formed middle profile (material thickness 2 mm) and guide rollers
- Ideal running characteristic and smoothness of running through integrated progressive-action
- Safety clip mounted in middle profile
- Double-sided captive profile
- Self closing, soft stop
- compatible with regular-extension drawer slide FR 1052 SCC
- Also available with 60 mm over-extension
- also available as heat resistant model (up to 110° C)
- Load Capacity 50 kg (full ext.), 40 kg (over ext. - drawer profile without screw holes)´

Specifications

Material Stainless steel 1.4509 (SCC)
Features solid delrin* rollers
Slide type Progressive-Action Full-Extension Drawer Slide
Width (mm) 18 mm
Load Dynamic up to 68 kg (full-ext.)
Capacity Dynamic up to 53 kg (over-ext.)

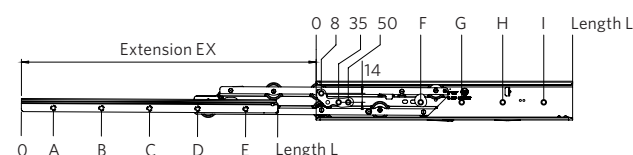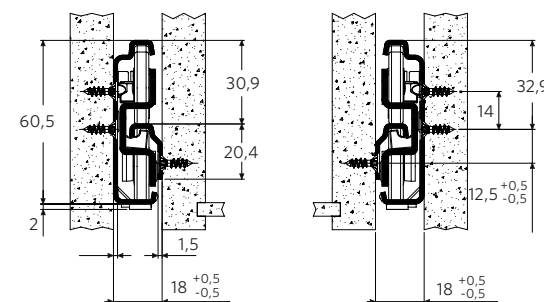

Chopping Board




Details

- Easy to clean
- Durable and lightweight
- Made of high-quality Polyethylene plastic material
- BPA Free
- Dishwasher safe
- Non-absorbent
- Odorless and non-toxic
- Eco-friendly

200x70cm Board

Specifications


Sizes WxDxH (mm) 2000x700x20
2000x700x30
2000x700x50



100x70cm Board

Specifications


Sizes WxDxH (mm) 1000x700x20
1000x700x30
1000x700x50



70x70cm Board

Specifications


Sizes WxDxH (mm) 700x700x50



60x40cm Board

Specifications

Sizes WxDxH (mm) 600x400x20



Amber

Amber
INDUSTRIES



+97165399883



maintenance@amberinds.com



P.O. Box: 71351, Warehouse #7908 Shed #4,
Al Sajaa, Industrial Area, Sharjah, U.A.E.